

# DIGITAL INDICATORS S\_DIAL

Digital comparators have contributed greatly to Sylvac's success and reputation for decades. Sylvac can therefore be considered the world leader in this type of instrument, thanks to the wide range of products available, but also because of the specifications and advanced functions offered by the dial indicators that you will find in this chapter.

## GENERAL CHARACTERISTICS :

- **Powered by lithium battery type CR2032**
- **Absolute measuring system S.I.S**
- **Automatic sleep and wake-up**
- **mm/inch conversion on all models**
- **Working temperature +5° to +40°C**
- **Comparators supplied with interchangeable steel M2.5 contact point, with tungsten carbide ball Ø 2 mm**





# Digital indicators

# S\_Dial

## SUMMARY OF ALL TYPES

B

	S_Dial MINI								S_Dial TEST				S_Dial WORK																			
	BASIC				SMART				BASIC				ANALOG		CBG		ADVANCED IP67		PLC													
RANGE	805-4121	805-4125	805-4521	805-4525	805-6121	805-6123	805-6125	805-6521	805-6523	805-6525	805-4321	805-4322	805-4323	805-1201	805-1301	805-1401	805-1501	805-1601	805-1621	805-5307	805-5507	805-6308	805-6317	805-5305	805-5505	805-5625	805-7301	805-7201	805-7501	805-7401		
0.8 mm											•		•																			
2.0 mm												•		•																		
12.5 mm	•	•	•	•	•	•	•	•	•	•				•	•						•	•	•	•			•	•				
25 mm																•	•					•			•				•	•		
50 mm																		•	•							•						
100 mm																																
150 mm																																
<b>RESOLUTION</b>																																
0.01 mm	•	•			•	•	•							•	•	•	•	•	•											•	•	
0.001 mm			•	•				•	•	•	•	•	•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
<b>MECHANIC</b>																																
Diameter 8 mm h6	•	•	•	•	•	•	•	•	•	•				•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Diameter 25mm g7																																
Dove tail	•	•	•	•	•	•	•	•	•	•	•	•	•																			
M1.4 contact point											•	•	•																			
M2.5 contact point	•	•	•	•	•	•	•	•	•	•				•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Rubber boot	•		•				•		•																							
IP51 (IEC 60529)														•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
IP54 (IEC 60529)	•		•								•	•	•								•	•	•	•	•	•	•	•	•	•		
IP65 (IEC 60529)																																
IP67 (IEC 60529)	•		•	•	•	•	•	•	•	•																•	•	•	•	•	•	
<b>DIAL</b>																																
Diameter 45 mm	•	•	•	•	•	•	•	•	•	•	•	•	•																			
Diameter 60 mm														•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Rotating											•	•	•								•	•	•	•	•	•	•	•	•	•	•	
Lifting cap	•	•	•	•	•		•							•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
<b>FUNCTIONS</b>																																
mm/inch	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Preset	•1)	•1)	•1)	•1)	•	•	•	•	•	•	•	•	•	•1)	•1)	•1)	•1)	•1)	•1)	•	•	•	•	•	•	•	•	•	•	•	•	
Preset dynamic																					•	•	•	•	•	•	•	•	•	•	•	
Measuring direction	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Hold					•	•	•	•	•	•	•	•	•								•	•	•	•	•	•	•	•	•	•	•	
Min / Max / Delta					•	•	•	•	•	•	•	•	•								•	•	•	•	•	•	•	•	•	•	•	
Tolerances																					•	•	•	•	•	•	•	•	•	•	•	
Absolute system S.I.S.*	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Auto off	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Analog display					•	•	•	•	•	•	•	•	•								•	•	•	•	•	•	•	•	•	•	•	
Setting by PC	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Programmable menus					•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Powered by connector	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Multiplication factor					•	•	•	•	•	•	•	•	•								•	•	•	•	•	•	•	•	•	•	•	
Ref I / II																							2)	2)	•	•	•	•	•	•	•	

\* SIS description on page 5

Models with Bluetooth® technology

1) Preset configuration only by PC  
2) 4 references



# Digital indicators

# S\_Dial

## SUMMARY OF ALL TYPES

	S_Dial WORK										ANALOG NANO SMART		S_Dial PRO														
	ADVANCED					SMART					NANO & NANO SMART		SMART														
	805-5201	805-5301	805-5401	805-5501	805-5601	805-5621	805-5641	805-5661	805-5671	805-5681	805-6301	805-6501	805-6621	805-6661	805-5306	805-5506	805-6306	805-6506	805-6307	805-6507	805-8601	805-8701	805-8602	805-8702	805-8501	805-8502	805-8661
<b>RANGE</b>																											
0.8 mm																											
2.0 mm																											
12.5 mm	•	•									•				•		•		•								
25 mm			•	•								•				•		•		•					•	•	
50 mm					•	•							•								•	•	•	•			
100 mm							•	•						•													•
150 mm									•	•																	
<b>RESOLUTION</b>																											
0.01 mm	•		•		•		•		•																		
0.001 mm		•		•		•		•		•	•	•	•														
0.0001 mm															•	•	•	•	•	•	•	•	•	•	•	•	•
<b>MECHANIC</b>																											
Diameter 8 mm h6	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Diameter 25 mm g7																							•	•			
Spring	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
M1.4 contact point																											
M2.5 contact point	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Rubber boot																											
IP51 (IEC 60529)																						•	•	•	•	•	•
IP54 (IEC 60529)	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•						
<b>DIAL</b>																											
Diameter 60 mm	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Rotating	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
<b>FUNCTIONS</b>																											
mm/inch	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Preset	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Preset dynamic																					•	•					
Measuring direction	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Hold	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Min / Max / Delta	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Tolerances	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Absolute system S.I.S*	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Auto off	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Analog display																					•	•					
Setting by PC	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Programmable menus	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Powered by connector	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Multiplication factor	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
Ref I / II	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•


B

# Digital test indicator

# S\_Dial TEST Smart

## DESCRIPTION

- First digital test indicator with integrated Bluetooth® system
- Instrument for checking roundness and flatness
- Data transfer by sending a request or by foot pedal
- Compact housing Ø 45 mm rotatable by 270°.
- Revolutionary mechanical construction, without gears or gears, which eliminates hysteresis error
- Digital display resolution 0.001 mm with analogue scale
- M1.4 stylus with Ø 2 mm tungsten carbide ball, swivelling and interchangeable
- Available in 3 versions :
  - Model with stylus length 12 mm, measuring range 0.8 mm
  - Model with stylus length 36 mm, measuring range 2.0 mm
  - Combination model for 12 and 36 mm styli (supplied with both styli), measuring range 0.8/2.0 mm
- Protected against liquids IP54

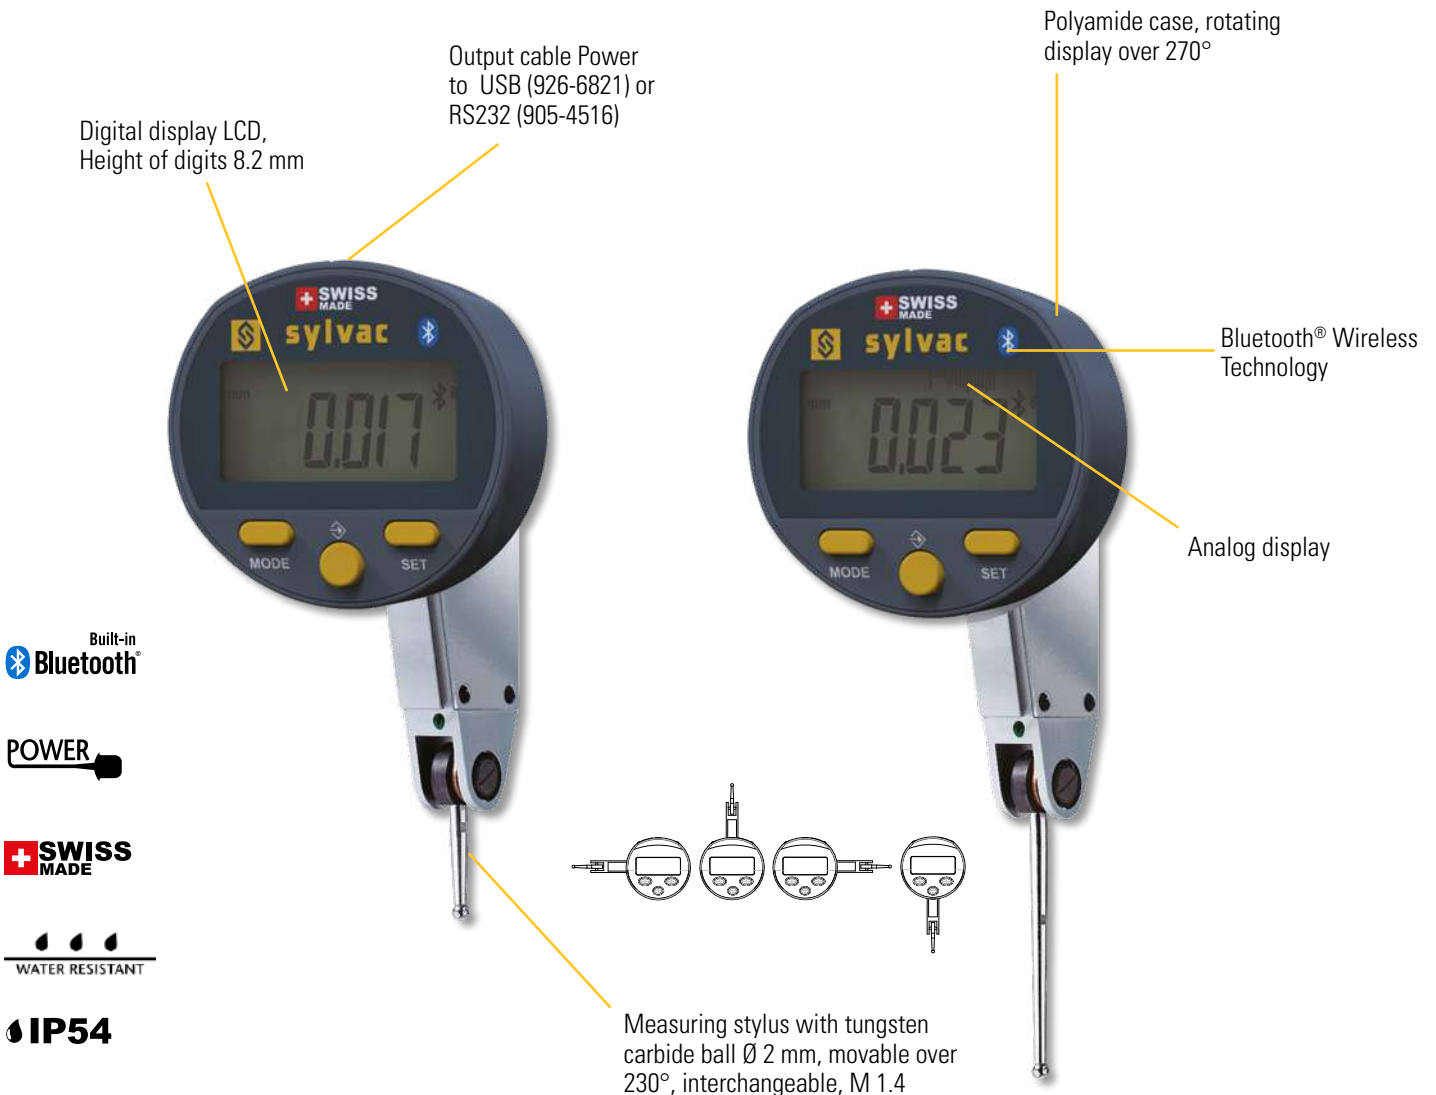




# Digital test indicator

# S\_Dial TEST Smart

## DIMENSIONAL DRAWING

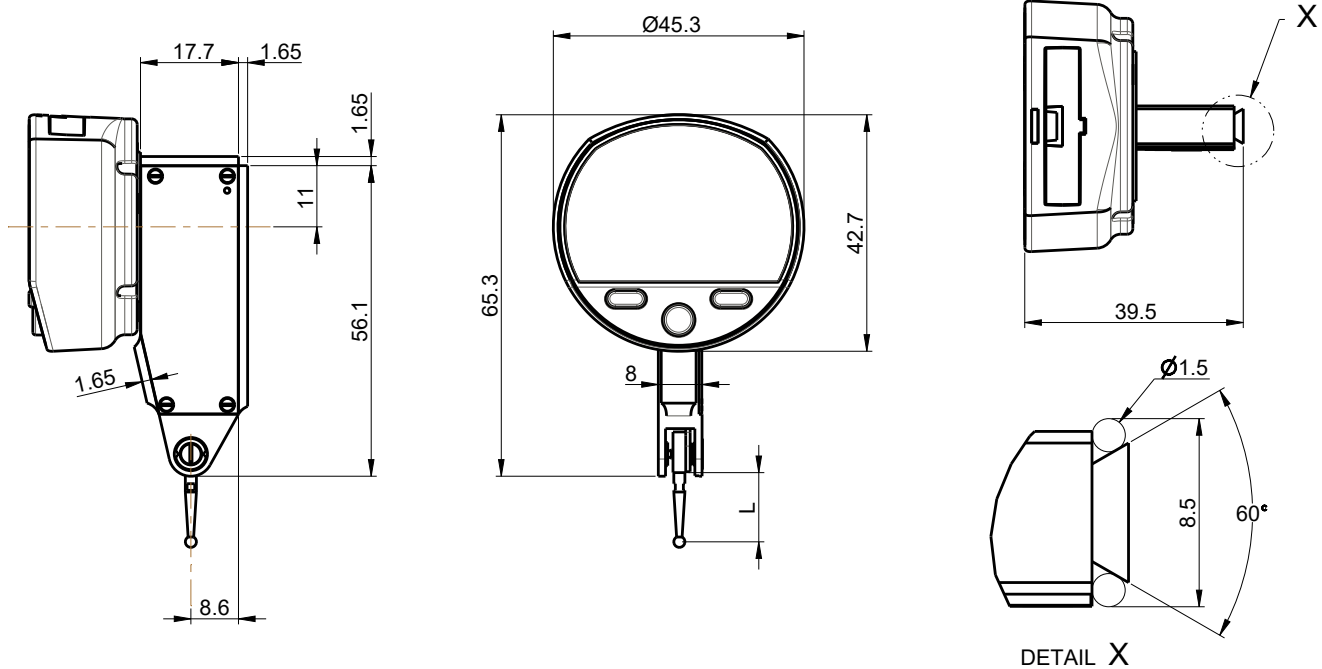

## TECHNICAL SPECIFICATIONS

		805-4321	805-4322	805-4323
Measurement capacity	mm	0.8	2.0	0.8 / 2.0
Stylus length L	mm	12.5	36.5	12.5 / 36.5
Accuracy $f_e$ ( $\alpha=0^\circ$ )	$\mu\text{m}$	3	8	3 / 8
Total accuracy $f_{ges}$ ( $\alpha=0^\circ$ )	$\mu\text{m}$	4	10	4 / 10
Reversibility $f_u$	$\mu\text{m}$	2	3	2 / 3
Resolution	mm	0.001mm / .00005"		
Repeatability $f_w$	$\mu\text{m}$	1		
Measuring force	N	0.15	0.06	0.15 / 0.06
Friction on probe orientation	N	4	1.6	4 / 1.6
Weight	g	70		
Protection rating according to IEC 60529		IP54		
Output data		Bluetooth® wireless technology* / RS232 / USB <sup>1)</sup>		
Zero setting		●		
min / max / delta display		●		
Analog display		●		
Selection of resolution		●		
Preset (0.01 resolution)		$\pm 99.999 \text{ mm} / \pm 3.99995 \text{ IN}$ ( $\pm 999.99 \text{ mm} / \pm 39.9995 \text{ IN}$ )		

<sup>1)</sup> see cables chapter


\* Up to 8 instruments connected per dongle #981-7100

# Digital test indicator

# S\_Dial TEST Smart

## DISPLAY

- ❶ Direct mm/inch conversion
- ❷ Analog display
- ❸ Min/max/delta mode
- ❹ Analogic resolution display
- ❺ Bluetooth® technology

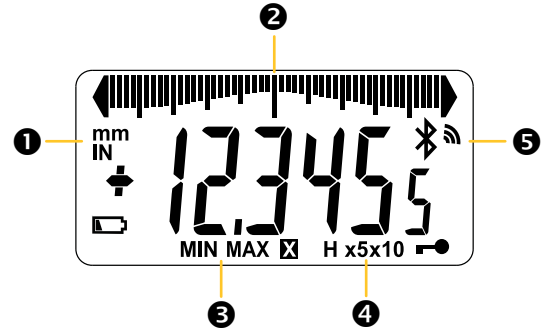

## STANDARD DELIVERY

- Instrument according to technical specifications
- Lithium battery CR2032 included
- Quickstart
- Stem Ø 8 mm (905-2247)
- Clamping key for measuring button
- 2 contact points Ø2mm, 12.5 and 36.5mm (model 805-4332 only)

## APPLICATIONS



Run-out measurement



Checking the alignment on milling machine.



Perpendicularity measurement with a S234 mounted on a Hi\_Gage ONE



# Mini digital indicators

# S\_Dial MINI Basic

## DESCRIPTION

- Smallest digital comparator available on the market, with compact Ø 45 mm non-rotating housing
- New robust construction
- Ideal for integration into machines or various measuring fixtures
- Only one central button with favourite function to choose between recall of the preset or transmission of the value
- Selection of unit (mm/inch) and direction of measurement
- Data output «Power», works without battery when connected via cable
- Digital display resolution 0.01 or 0.001 mm
- Measuring range 12.5 mm
- Available in Protected or Standard execution
  - P version: IP67 with bellows-protected spindle, without lifting cap
  - S version: IP54, without bellows, with lifting cap


B



# Mini digital indicators

# S\_Dial MINI Basic

## DIMENSIONAL DRAWINGS

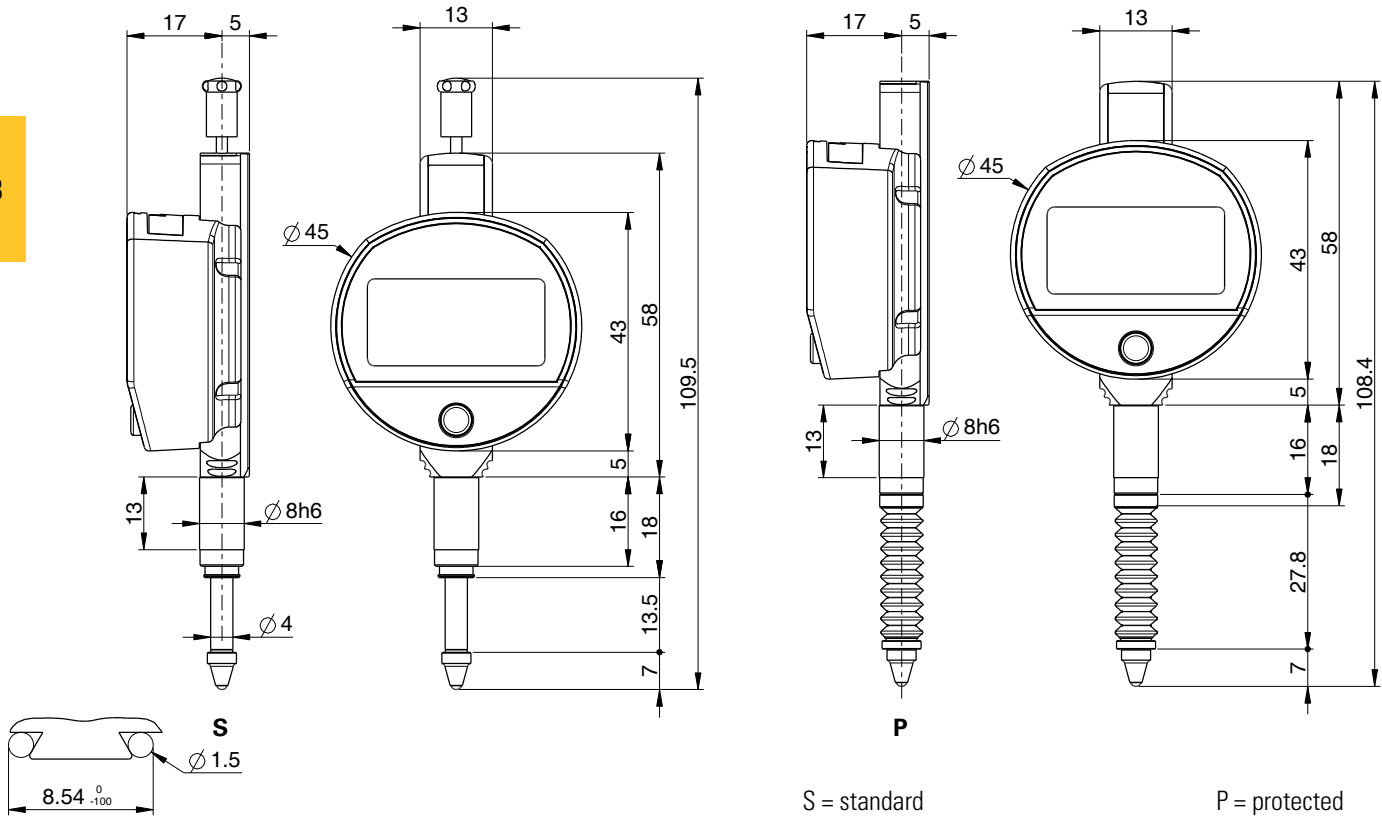

## TECHNICAL SPECIFICATIONS

		805-4121	805-4125	805-4521	805-4525
Measuring range	mm	12.5	12.5	12.5	12.5
Analog scale		---	---	---	---
Resolution	mm	0.01	0.01	0.001	0.001
Execution <sup>3)</sup>		S	P	S	P
Max. Error fe	µm	10 <sup>1)</sup>	10 <sup>1)</sup>	4	4
Repeatability	µm	2	2	2	2
Measuring force <sup>2)</sup>	N	0.5 - 0.90 N	0.6 - 1.3 N	0.5 - 0.90 N	0.6 - 1.3 N
Zero setting				●	
Resolution selection				---	
PRESET = (max. ±999.99 mm)				● <sup>5)</sup>	
Min / max / delta display				---	
Selection of measuring direction				●	
Multiplication factor				---	
Output data				USB / RS232 <sup>4)</sup>	
IP rating		IP54	IP67	IP54	IP67

<sup>1)</sup> ± 1 digit

<sup>2)</sup> Values ± 20%, indicator in vertical position, outgoing measuring spindle

<sup>3)</sup> S = Standard P = Protected

<sup>4)</sup> see cables chapter

<sup>4)</sup> voir chapitre câbles

<sup>5)</sup> Preset configuration only by computer





# Mini digital indicators

# S\_Dial MINI Smart

## DESCRIPTION

- Smallest digital comparator available on the market with compact Ø 45 mm non-rotating housing and integrated Bluetooth® system
- New robust construction
- Ideal for integration into machines or various measuring fixtures
- Data output «Power», works without battery when connected via cable
- Three buttons, including the central button with selectable favourite function
- Wide range of functions, including MIN/MAX/DELTA
- Digital display resolution 0.01 or 0.001 mm with analogue scale
- Measuring range 12.5 mm
- Available in Protected or Standard execution
  - P version: IP67 with bellows-protected spindle, without lifting cap
  - S version: IP54 or IP67, without bellows, with or without lifting cap


B



# Mini digital indicators

# S\_Dial MINI Smart

B

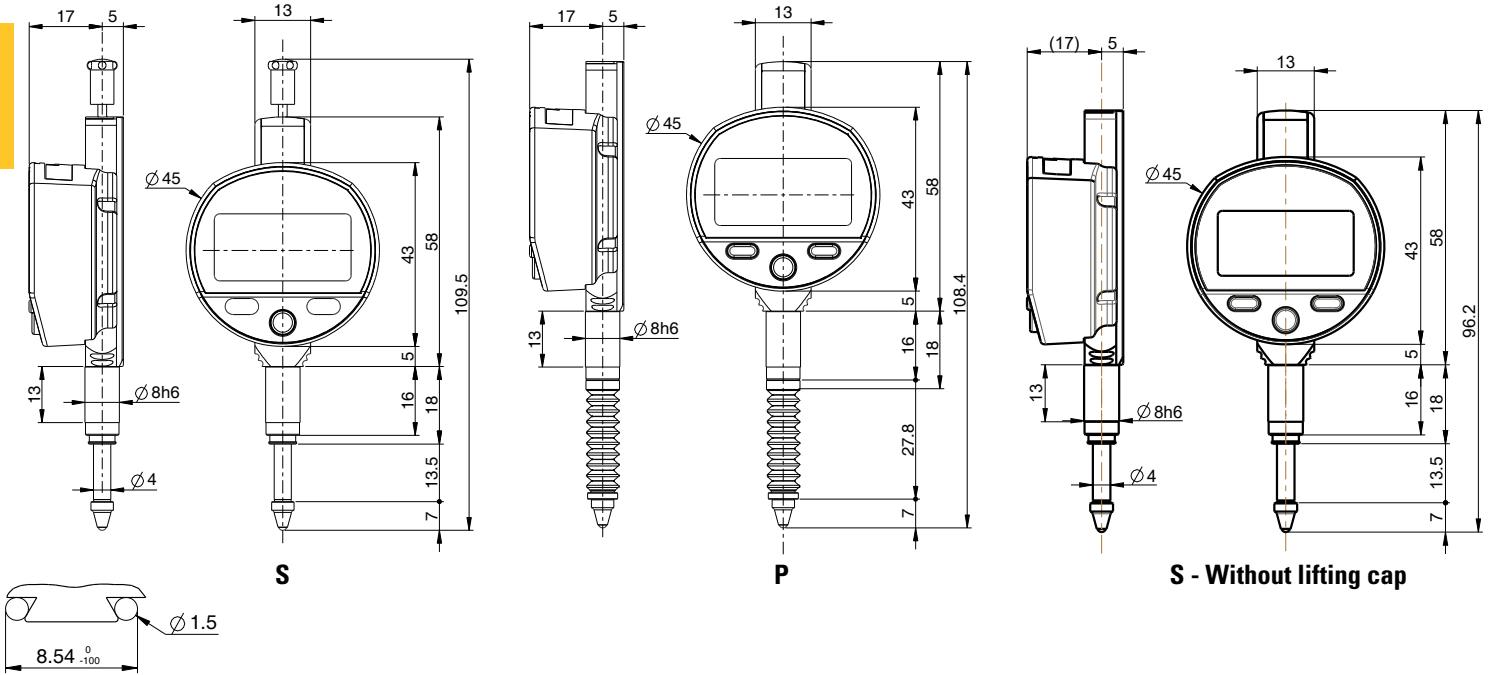

Smart		805-6121	805-6123	805-6125	805-6521	805-6523	805-6525
Measuring range	mm	12.5	12.5	12.5	12.5	12.5	12.5
Analog scale		●	●	●	●	●	●
Resolution	mm	0.01	0.01	0.01	0.001	0.001	0.001
Execution <sup>3)</sup>		S	S	P	S	S	P
Max. Error fe	µm	10 <sup>1)</sup>	10 <sup>1)</sup>	10 <sup>1)</sup>	4	4	4
Repeatability	µm	2	2	2	2	2	2
Measuring force <sup>2)</sup>	N	0.5 - 0.90 N	0.5 - 0.90 N	0.6 - 1.3 N	0.5 - 0.90 N	0.5 - 0.90 N	0.6 - 1.3 N
Lifting cap		●			●		
Zero setting					●		
Resolution selection					●		
PRESET = (max. ±999.99 mm)					●		
Min / max / delta display					●		
Selection of measuring direction					●		
Multiplication factor					●		
Output data		Bluetooth® wireless technology* / RS232 / USB <sup>4)</sup>					
IP rating		IP67	IP67	IP67	IP67	IP67	IP67

<sup>1)</sup> ± 1 digit

<sup>2)</sup> Values ± 20%, indicator in vertical position, outgoing measuring spindle

<sup>3)</sup> S = Standard P = Protected

<sup>4)</sup> see cables chapter

\* Up to 8 instruments connected per dongle #981-7100



# Mini digital indicators

# S\_Dial MINI Smart

## STANDARD DELIVERY

- Instrument according to technical specifications
- Lithium battery CR2032 included
- Instruction manual
- Calibration certificate for instruments with resolution 0.001 mm

B

## MEASURING FORCE FOR RANGE 12.5 mm

	S	P
Standard	0.5 - 0.90 N	0.6 - 1.3 N
Low <sup>1)</sup>	0.35 - 0.50 N	---
High <sup>1)</sup>	1.80 - 2.3 N	---

Tolerance ±20%, indicator in vertical position, spindle in outgoing measurement.

<sup>1)</sup> on request

## APPLICATIONS



Checking of an internal Ø with a mechanical device



Measurement of the vertical displacement of an element



Measurement of internal chamfer


# Digital indicators

# S\_Dial WORK

## DESCRIPTION

## BASIC

- Simple and robust digital comparator with  $\varnothing$  59.5 mm non-rotating housing
- One central button with favourite function to choose between preset recall or value transmission
- Selection of unit (mm/inch) and direction of measurement
- Proximity» and «Power» data outputs allowing the instrument to be used without batteries when connected by this cable.
- Available in version with display resolution 0.01 mm and 0.001 mm
- Measuring range selectable: 12.5, 25 and 50 mm

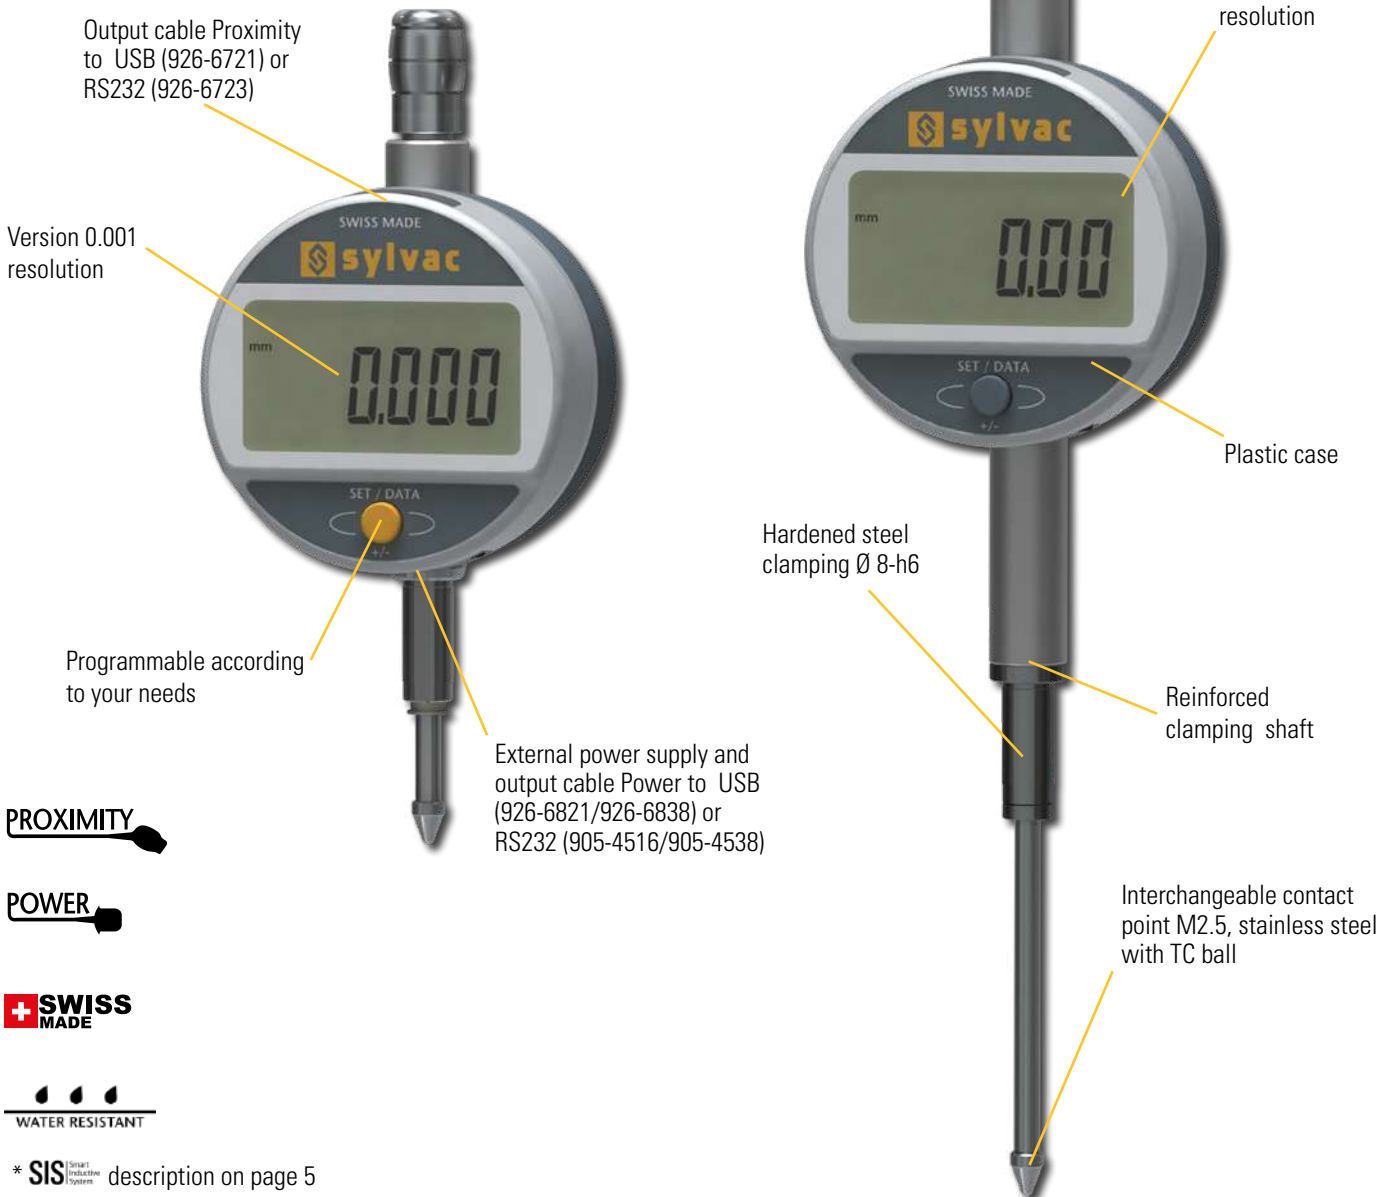




# Digital indicators

# S\_Dial WORK

## DIMENSIONAL DRAWINGS

## BASIC

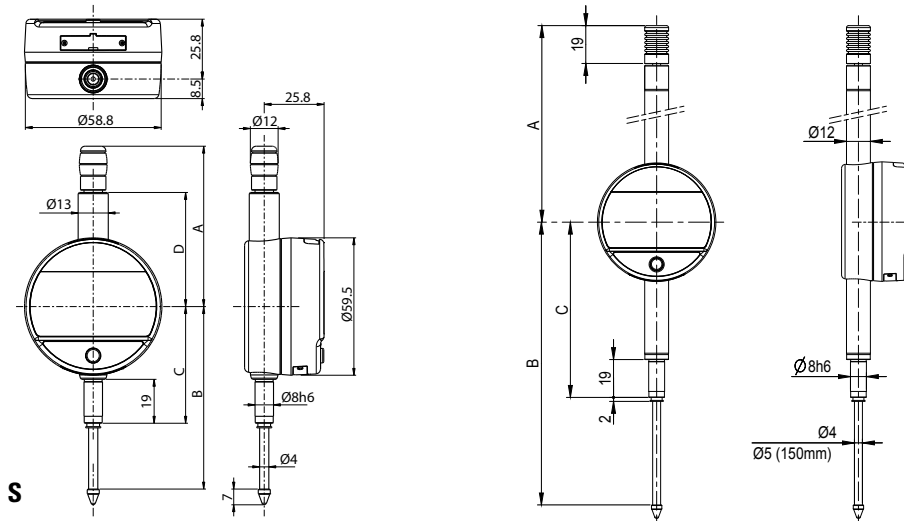

## TECHNICAL SPECIFICATIONS

		805-1201	805-1301	805-1401	805.1501	805-1601	805-1621
Measuring range	mm	12.5	12.5	25	25	50	50
Resolution	mm	0.01	0.001	0.01	0.001	0.01	0.001
Max. Error fe	µm	10 <sup>1)</sup>	<b>4</b>	10 <sup>1)</sup>	<b>5</b>	20 <sup>1)</sup>	<b>7</b>
Repeatability	µm	2					
IP rating		IP51					
A	mm	56.7		69.9		121.3	
B	mm	66.1		78.5		142	
C	mm	50.5		50.5		88	
D	mm	36.6		49.4		-	
Output data		USB / RS232					
Programmable by PC		●					
Standard functions (customized by PC)		Preset (max 999.999) only programmable by PC with cable, mm/inch, direction of measurement					

<sup>1)</sup> ± 1 digit

## STANDARD DELIVERY

## MEASURING FORCE

- Instrument according to technical specifications
- Lithium battery CR2032 included
- Instruction manual
- Calibration certificate for instruments 0.001 mm

		S 12.5	S 25	S 50
Standard	N	0.65 - 0.90	0.65 - 1.15	1.1 - 2.6
Low <sup>3)</sup>	N	0.4 - 0.55	0.45 - 0.9	---
High <sup>3)</sup>	N	1.0 - 1.6	0.9 - 1.8	---

Tolerance ± 20%, spindle in outgoing measurement position.  
<sup>3)</sup> on request



# Digital indicators


# S\_Dial WORK

## DESCRIPTION

## ADVANCED

B

- Robust digital comparator with Ø 59.5 mm housing rotatable by 270°.
- Large display with colour LED tolerance status indication
- Three buttons, including the central button with selectable favourite function
- Wide range of functions, including MIN/MAX/DELTA
- Proximity» and «Power» data outputs allowing the instrument to be used without batteries when connected by this cable.
- Available with display resolution 0.01 mm or 0.001 mm
- Measuring range selectable: 12.5, 25, 50, 100 and 150 mm
- The 12.5 and 25 mm versions are available in special low or high pressure versions on request.
- Protected IP54

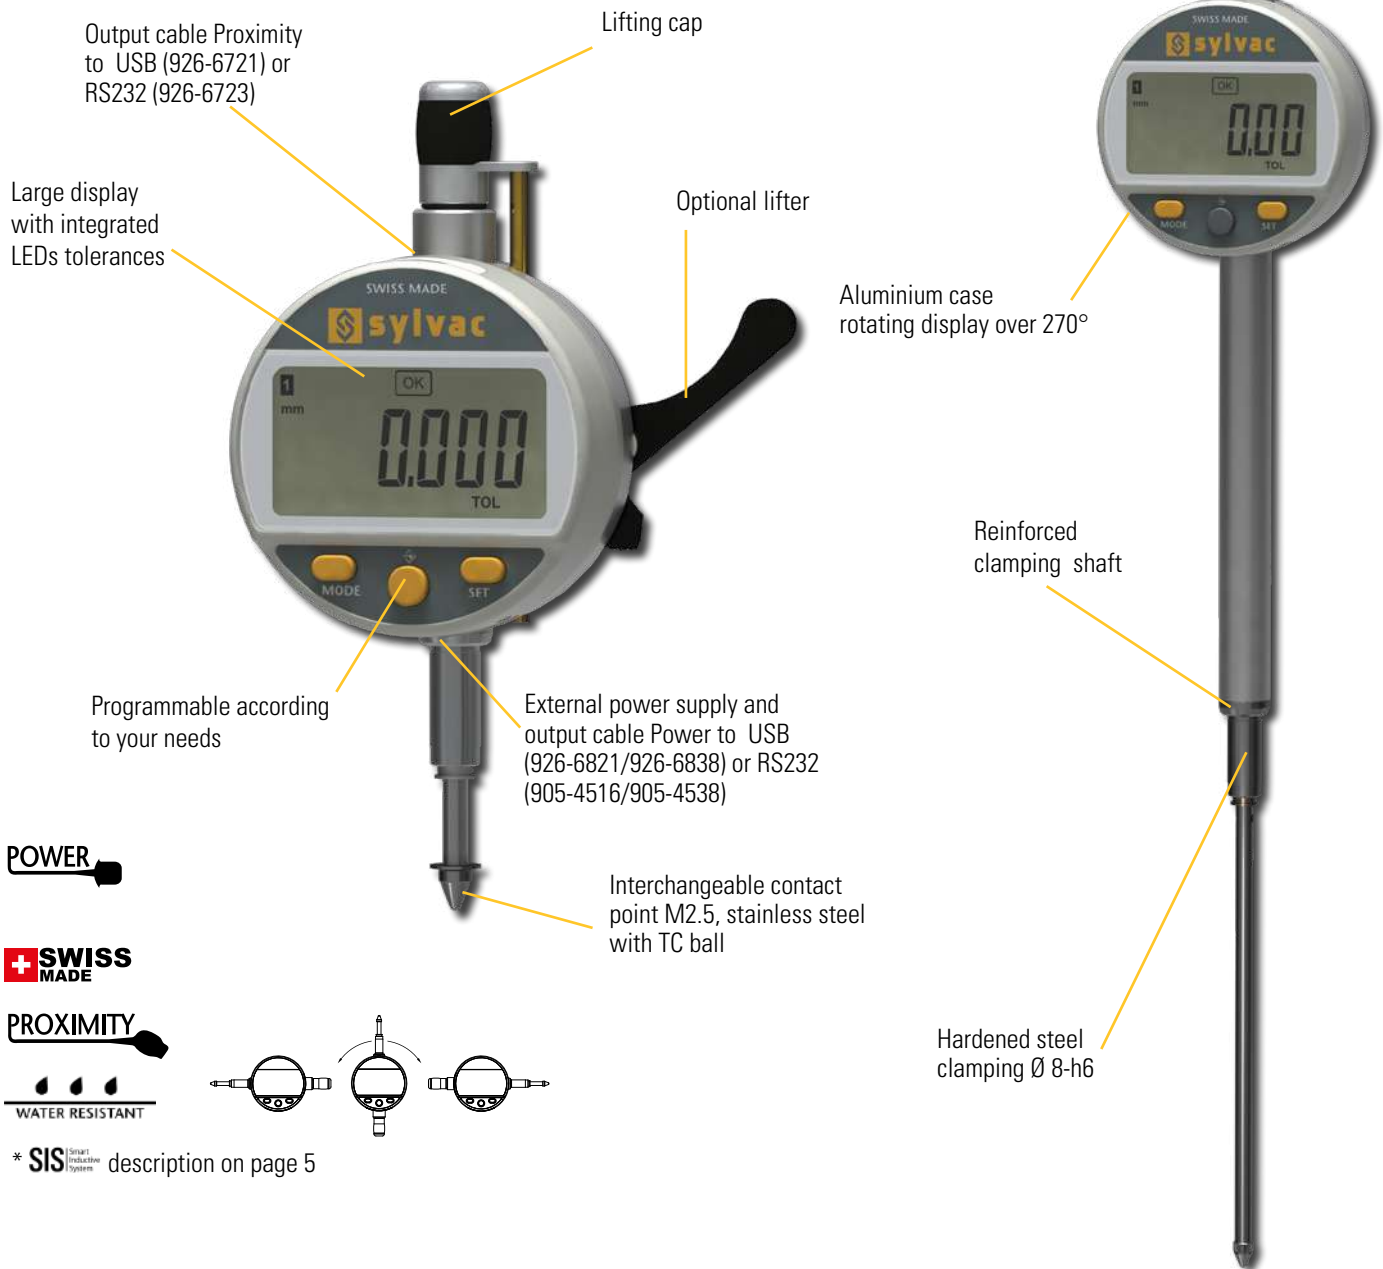

**POWER**

**SWISS MADE**

**PROXIMITY**

**WATER RESISTANT**

\* SIS description on page 5




# Digital indicators

# S\_Dial WORK

## DIMENSIONAL DRAWINGS

## ADVANCED

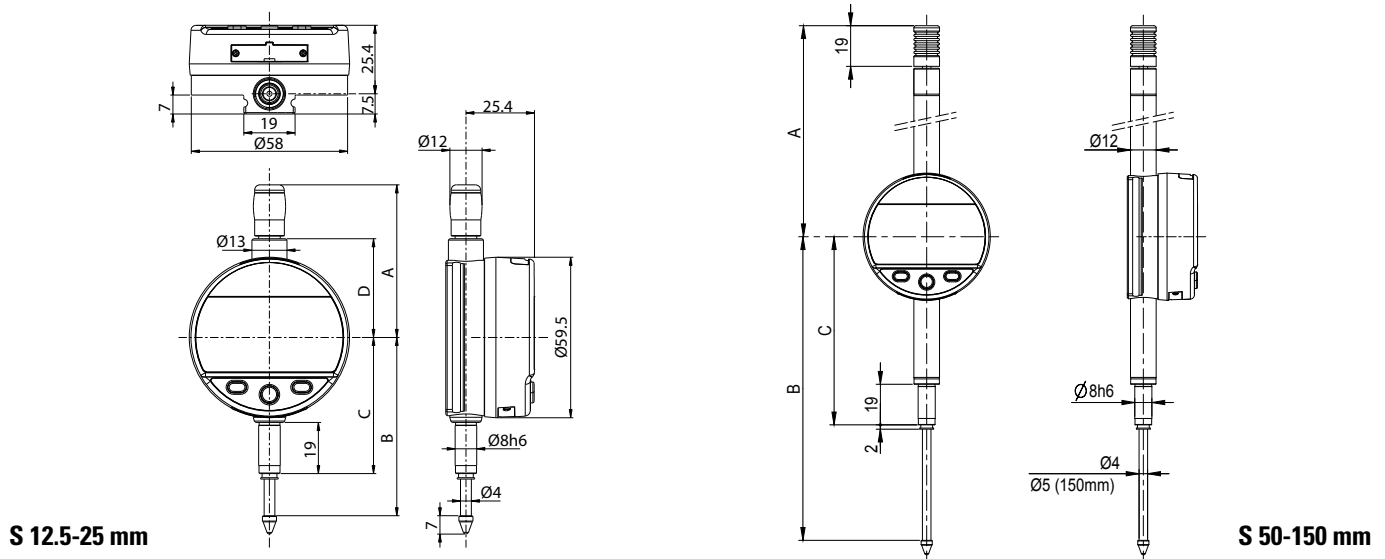

**S 12.5-25 mm**

**S 50-150 mm**

## TECHNICAL SPECIFICATIONS

		805-5201	805-5301	805-5401	805-5501	805-5601	805-5621	805-5641	805-5661	805-5671	805-5681
Measuring range	mm	12.5	12.5	25	25	50	50	100	100	150	150
Resolution	mm	0.01	0.001	0.01	0.001	0.01	0.001	0.01	0.001	0.01	0.001
Max. Error fe	µm	10 <sup>1)</sup>	<b>3</b>	10 <sup>1)</sup>	<b>4</b>	20 <sup>1)</sup>	<b>5</b>	20 <sup>1)</sup>	<b>6</b>	20 <sup>1)</sup>	<b>10</b>
Repeatability	µm	2									
IP rating		IP54									
A	mm	56.7		69.4		121		172		224	
B	mm	66.1		78.5		142		244		349	
C	mm	50.5		50.5		88		139		193	
D	mm	36.6		49.4		-		-		-	
Output data		USB / RS232									
Programmable by PC		●									
Standard functions (customized by PC)		mm/inch, ref I/II, preset (max 999.999) min/max/delta, tolerances, resolution, direction of measurement, multiplication factor, automatic or manual switch off, key lock									

<sup>1)</sup> ± 1 digit

## STANDARD DELIVERY

## MEASURING FORCE

- Instrument according to technical specifications
- Lithium battery CR2032 included
- Instruction manual
- Calibration certificate for instruments 0.001 mm

		12.5	25	50	100	150
Standard	N	0.65 - 0.9	0.65 - 1.15	1.1 - 2.6	1.8 - 3.8	2.6 - 5.7
Low <sup>2)</sup>	N	0.4 - 0.55	0.45 - 0.9	---	---	---
High <sup>2)</sup>	N	1.0 - 1.6	0.9 - 1.8	---	---	---

Tolerance ± 20%, spindle in outgoing measurement position.  
<sup>2)</sup> on request





# Digital indicators


# S\_Dial WORK

## DESCRIPTION

ADVANCED IP67

- Robust digital comparator with Ø 59.5 mm housing rotatable by 270°.
- Large display with 0.001 mm resolution and colour LED tolerance status indication
- Three buttons, including the central button with selectable favourite function
- Wide range of functions, including MIN/MAX/DELTA
- Proximity» and «Power» data outputs allowing the instrument to be used without batteries when connected by this cable.
- Measuring range selectable: 12.5, 25 and 50 mm
- IP67 protection with bellows-protected stem and dust cap
- Brake valve on 50 mm version

B

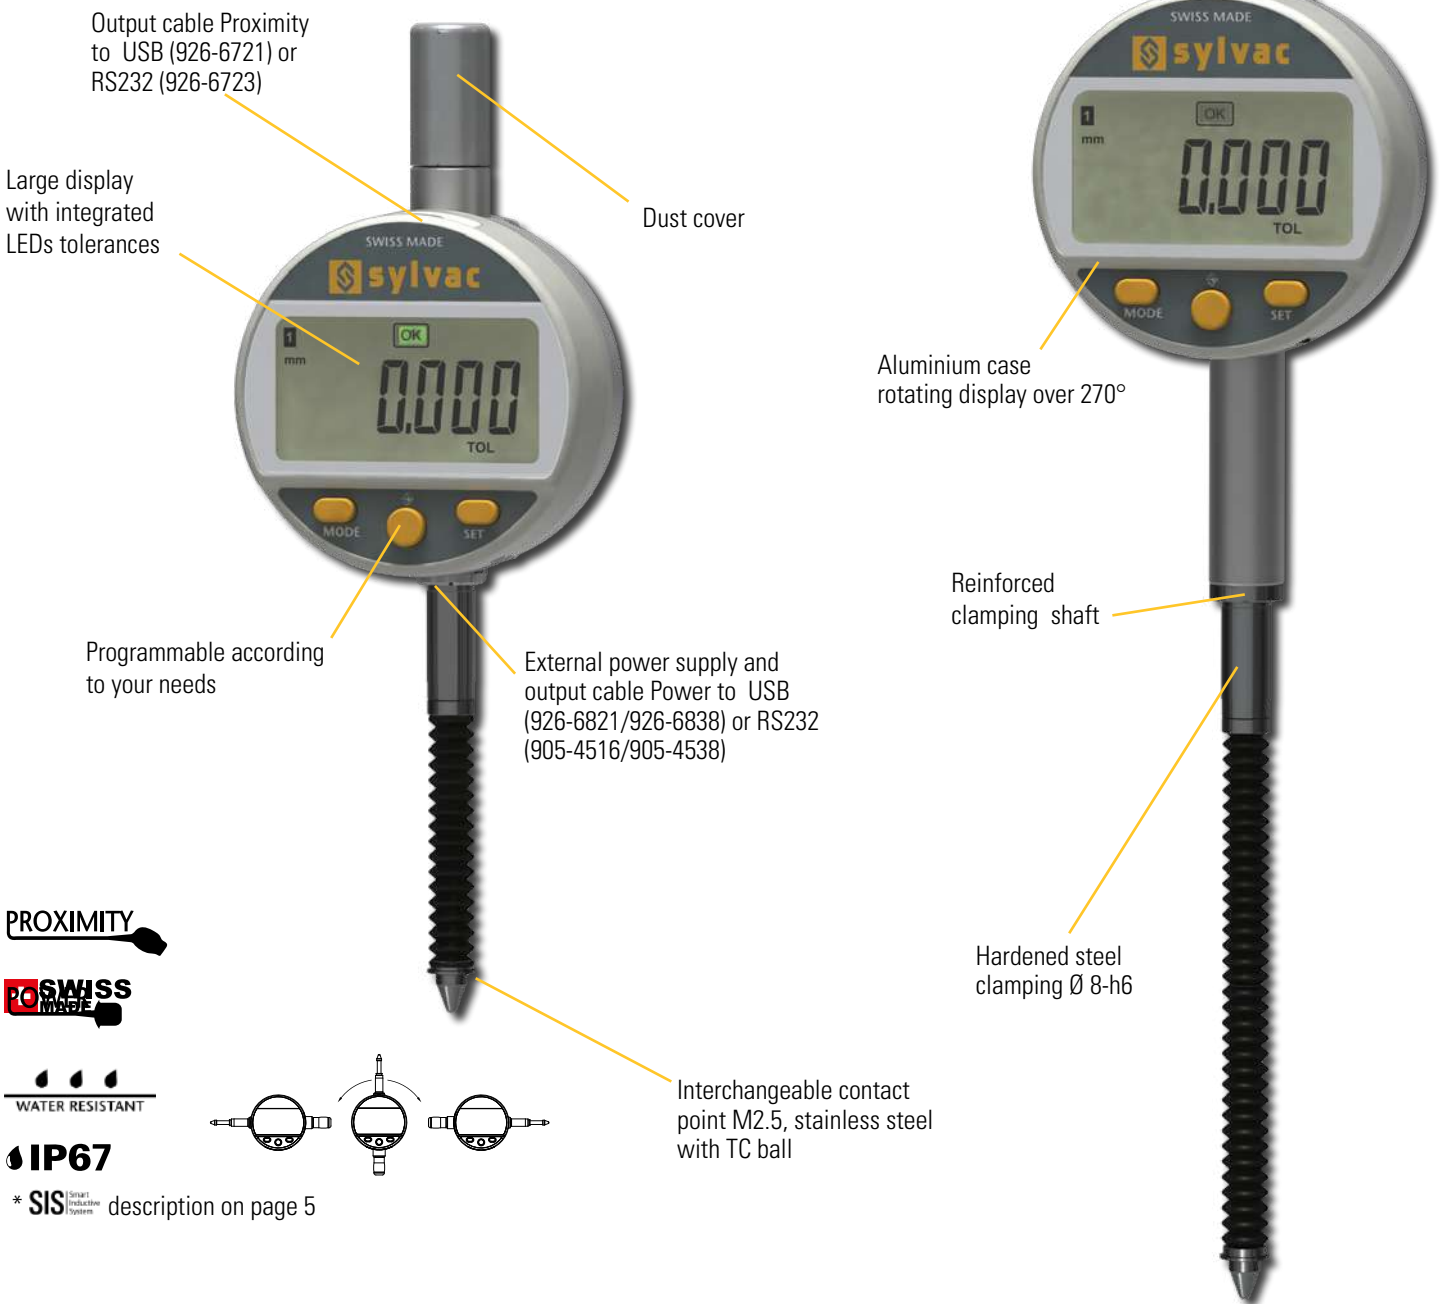






# Digital indicators

# S\_Dial WORK

## DIMENSIONAL DRAWINGS

## ADVANCED IP67

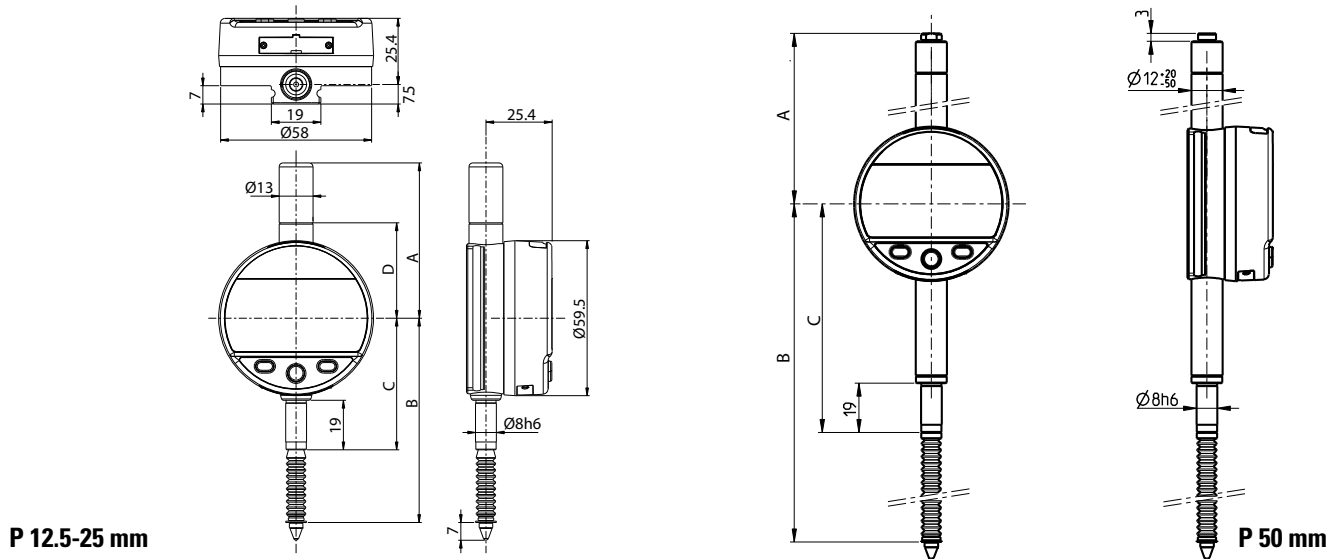

## TECHNICAL SPECIFICATIONS

		805-5305	805-5505	805-5625
Measuring range	mm	12.5	25	50
Resolution	mm	0.001	0.001	0.001
Max. Error fe	µm	<b>3</b>	<b>4</b>	<b>5</b>
Repeatability	µm		2	
IP rating			IP67	
A	mm	59.6	85.4	104.4
B	mm	78.4	99.7	175.3
C	mm	50.5	50.5	88
D	mm	36.6	49.4	-
Output data		USB / RS232		
Programmable by PC		●		
Standard functions (customized by PC)		mm/inch, ref I/II, preset (max 999.999) min/max/delta, tolerances, resolution, direction of measurement, multiplication factor, automatic or manual switch off, key lock		

## STANDARD DELIVERY

## MEASURING FORCE

- Instrument according to technical specifications
- Lithium battery CR2032 included
- Instruction manual
- Calibration certificate for instruments 0.001 mm

		P 12.5	P 25	P 50
Standard	N	0.7 – 1.4	0.65 – 1.8	0.9 – 2.8
Low <sup>2)</sup>	N	---	---	---
High <sup>2)</sup>	N	---	---	---

Tolerance ± 20%, spindle in outgoing measurement position.  
<sup>2)</sup> on request



# Digital indicators


# S\_Dial WORK

## DESCRIPTION

## SMART

- Robust digital comparator with Ø 59.5 mm housing rotatable by 270°.
- Large display resolution 0.001 mm
- Integrated Bluetooth® system
- Large display with colour LED tolerance status indication
- Three buttons, including the central button with selectable favourite function
- Wide range of functions, including MIN/MAX/DELTA
- Proximity» and «Power» data outputs allowing the instrument to be used without batteries when connected by this cable.
- Measuring range selectable: 12.5, 25, 50 and 100 mm
- Protection class IP54

B

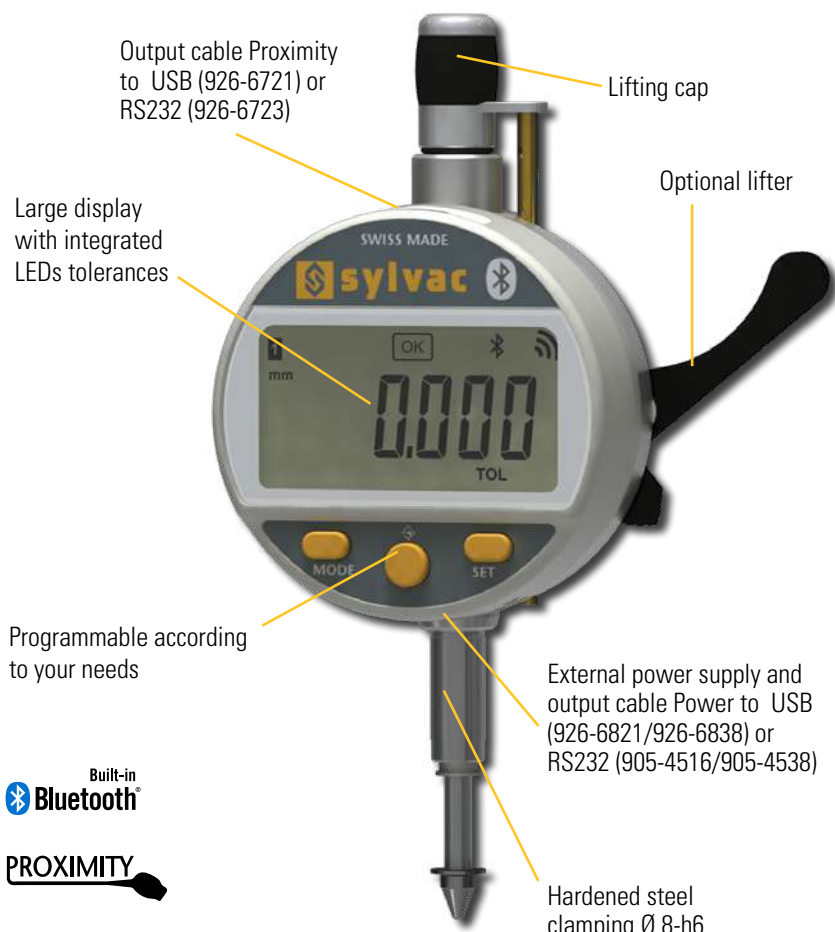


Built-in Bluetooth®

**PROXIMITY**

**POWER**

**SWISS MADE**

WATER RESISTANT



\* SIS Smart Inductive System description on page 5




# Digital indicators



# S\_Dial WORK

## DIMENSIONAL DRAWINGS

## SMART

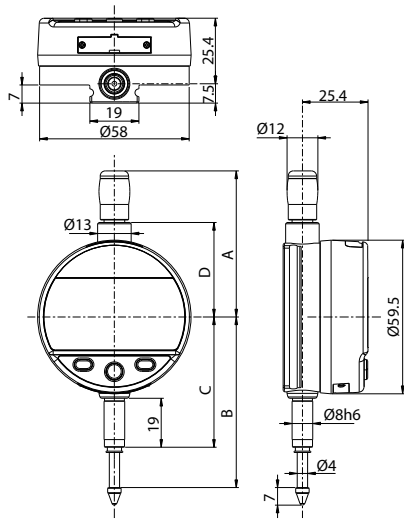

**S 12.5 - 25**

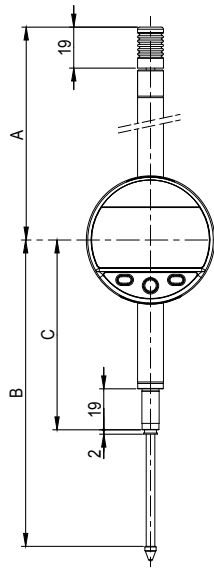

**S 50 - 100**



## TECHNICAL SPECIFICATIONS

		805-6301	805-6501	805-6621	805-6661
Measuring range	mm	12.5	25	50	100
Resolution	mm	0.001	0.001	0.001	0.001
Max. Error fe	µm	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>
Repeatability	µm	2			
IP rating		IP54			
A	mm	56.7	69.4	121	172
B	mm	66.1	78.5	142	244
C	mm	50.5	50.5	88	139
D	mm	36.6	49.4	-	-
Output data		USB / RS232 / Bluetooth® wireless technology*			
Programmable by PC		●			
Standard functions (customized by PC)		mm/inch, ref I/II, preset (max 999.999) min/max/delta, tolerances, resolution, direction of measurement, multiplication factor, automatic or manual switch off, key lock			

<sup>1)</sup> ± 1 digit

**\* Up to 8 instruments connected per dongle #981-7100**

## STANDARD DELIVERY

## MEASURING FORCE

- Instrument according to technical specifications
- Lithium battery CR2032 included
- Instruction manual
- Calibration certificate for instruments 0.001 mm

		12.5	25	50	100
Standard	N	0.65 - 0.90	0.65 - 1.15	1.1 - 2.6	1.8 - 3.8
Low <sup>2)</sup>	N	0.4 - 0.55	0.45 - 0.9	---	---
High <sup>2)</sup>	N	1.0 - 1.6	0.9 - 1.8	---	---

Tolerance ± 20%, spindle in outgoing measurement position.  
<sup>2)</sup> on request



# Digital indicators

# S\_Dial WORK

## DESCRIPTION

## ANALOG & ANALOG SMART

- Robust digital comparator with Ø 59.5 mm housing rotatable by 270°.
- Integrated Bluetooth® system on Smart model
- Large display with 0.001 mm resolution and colour LED tolerance status indication
- Analogue display with selectable scale (from 0.2 µm per division)
- Three buttons, including the central button with selectable favourite function
- Wide range of functions, including MIN/MAX/DELTA
- Proximity» and «Power» data outputs allowing the instrument to be used without batteries when connected by this cable.
- Measuring range selectable: 12.5 and 25 mm
- Special low or high pressure versions available on request
- Protection class IP54


B



- Built-in Bluetooth
- PROXIMITY
- POWER

**SWISS MADE**

WATER RESISTANT



\* SIS description on page 5




# Digital indicators

# S\_Dial WORK

## DIMENSIONAL DRAWINGS

## ANALOG & ANALOG SMART

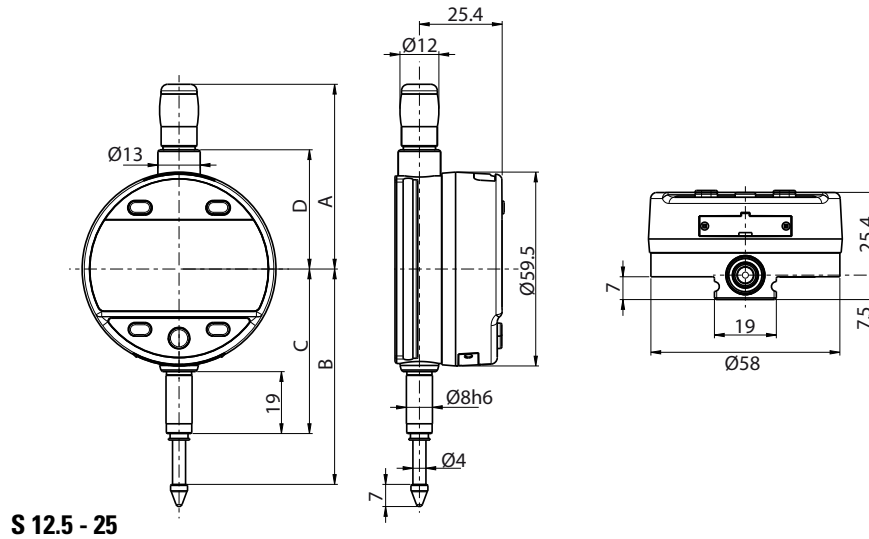

## TECHNICAL SPECIFICATIONS

		805-5307	805-5507	805-6308
Measuring range	mm	12.5	25	12.5
Resolution	mm	0.001		
Max. Error fe	µm	<b>3</b>	<b>4</b>	<b>3</b>
Repeatability	µm	2		
IP rating		IP54		
A	mm	56.7	69.4	56.7
B	mm	66.1	78.5	66.1
C	mm	50.5	50.5	50.5
D	mm	36.6	49.4	36.6
Output data		USB / RS232		USB / RS232 / Bluetooth® *
Programmable by PC		●		
Standard functions (customized by PC)		mm/inch, preset (max 999.999) min/max/delta, tolerances, resolution, direction of measurement, multiplication factor, automatic or manual switch off, key lock		

<sup>1)</sup> ± 1 digit

**\* Up to 8 instruments connected per dongle #981-7100**

## STANDARD DELIVERY

## MEASURING FORCE

- Instrument according to technical specifications
- Lithium battery CR2032 included
- Instruction manual
- Calibration certificate

		S 12.5	S 25
Standard	N	0.65 - 0.90	0.65 - 1.15
Low <sup>2)</sup>	N	0.4 - 0.55	0.45 - 0.9
High <sup>2)</sup>	N	1.0 - 1.6	0.9 - 1.8

Tolerance ± 20%, spindle in outgoing measurement position.

<sup>2)</sup> on request

# Digital indicators

# S\_Dial WORK



## DESCRIPTION

CBG

- Special version for cylindrical bore gauges
- Data output Power, Proximity & Bluetooth®
- Introduction of the Preset value on the saved Min value
- Quick measure of the reversal point
- Robust construction
- Water and coolant resistant
- Broad choice of functions (MIN/MAX/DELTA, TOL, PRESET, AUTO OFF, etc.)
- Automatic wake-up and sleeping mode, Absolute System S.I.S\*
- Maximum error of 3 µm



B

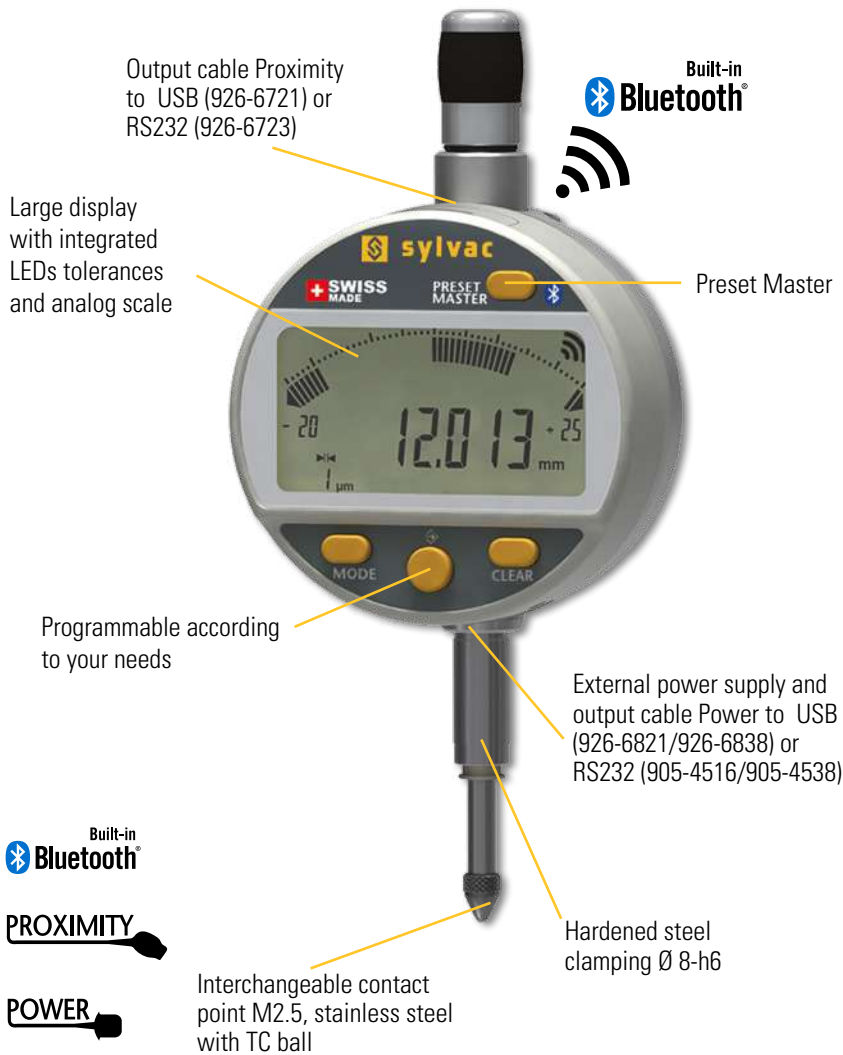

\* SIS description on page 5




# Digital indicators

# S\_Dial WORK

## DIMENSIONAL DRAWINGS

CBG

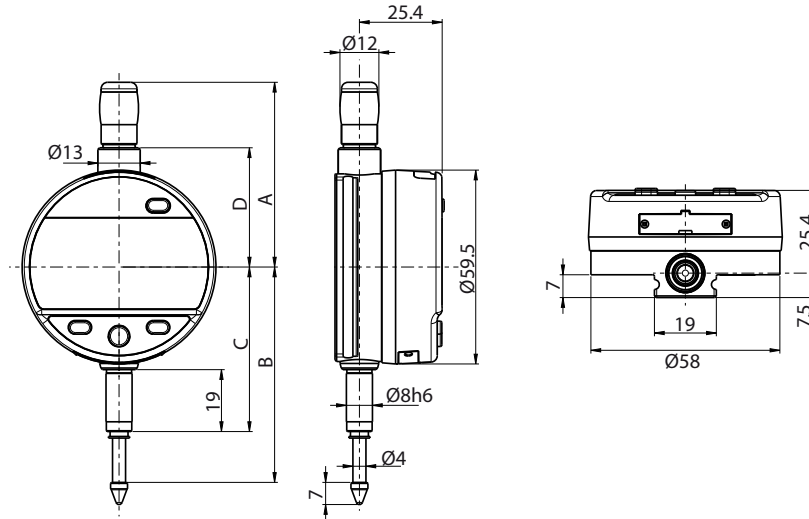

## TECHNICAL SPECIFICATIONS

		<b>805-6317</b>
Measuring range	mm	12.5
Resolution	mm	0.001
Max. Error fe	µm	<b>3</b>
Repeatability	µm	2
IP rating		IP54
A	mm	56.7
B	mm	66.1
C	mm	50.5
D	mm	36.6
Output data	USB / RS232 / Bluetooth® wireless technology*	
Programmable by PC	●	
Standard functions (customized by PC)	mm/inch, preset (max 999.999) min/max/delta, tolerances, resolution, multiplication factor, automatic or manual switch off	

<sup>1)</sup> ± 1 digit

**\* Up to 8 instruments connected per dongle #981-7100**

## STANDARD DELIVERY

## MEASURING FORCE

- Instrument according to technical specifications
- Lithium battery CR2032 included
- Instruction manual
- Calibration certificate

		<b>S 12.5</b>
Standard	N	0.65 - 0.90
Low <sup>2)</sup>	N	0.4 - 0.55
High <sup>2)</sup>	N	1.0 - 1.6

Tolerance ± 20%, spindle in outgoing measurement position.  
<sup>2)</sup> on request

# Digital indicators


# S\_Dial WORK

## DESCRIPTION

## NANO & NANO SMART

- Robust digital comparator with Ø 59.5 mm housing rotatable by 270°.
- Integrated Bluetooth® system on Smart model
- Large display resolution 0.0001 mm (0.1 µm) with tolerance status indication by colour LEDs
- High accuracy and repeatability
- Three buttons, including the central button with selectable favourite function
- Wide range of functions, including MIN/MAX/DELTA
- Proximity» and «Power» data outputs allowing the instrument to be used without batteries when connected by this cable.
- Measuring range selectable: 12.5 and 25 mm
- Special low or high pressure versions available on request
- Protection class IP54

B

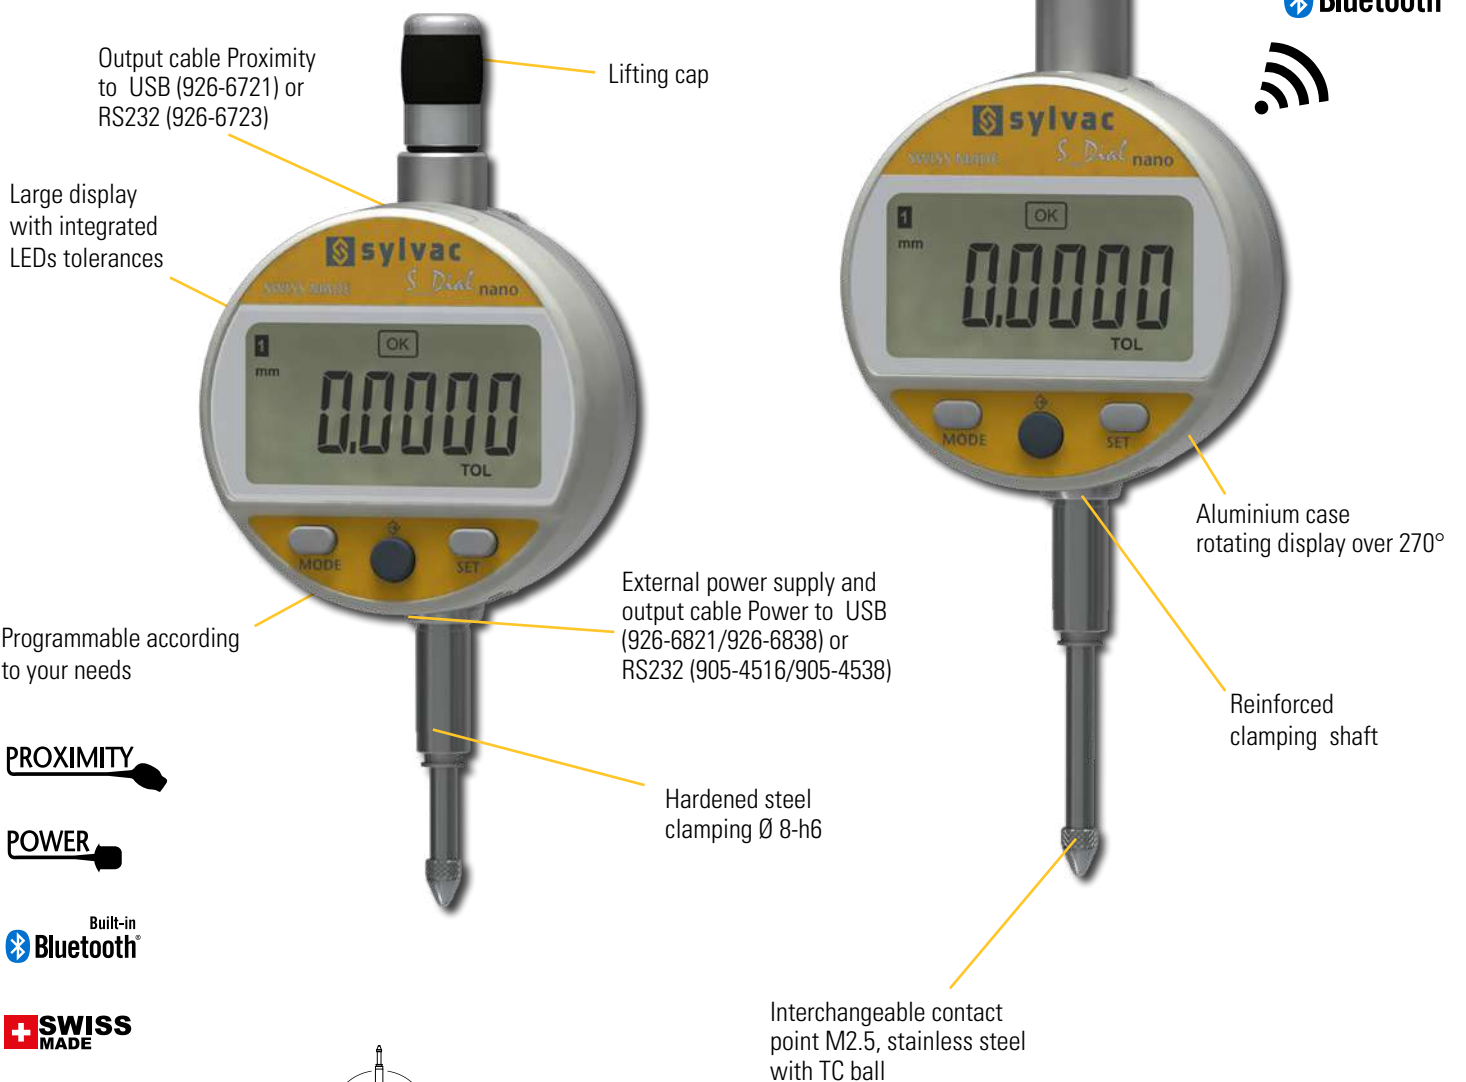


**PROXIMITY**

**POWER**

Built-in **Bluetooth**

**SWISS MADE**

**WATER RESISTANT**



\* SIS description on page 5

**Max error 1.2 µm**  
**Repeatability 0.3 µm**






# Digital indicators

# S\_Dial WORK

## DIMENSIONAL DRAWINGS

## NANO & NANO SMART

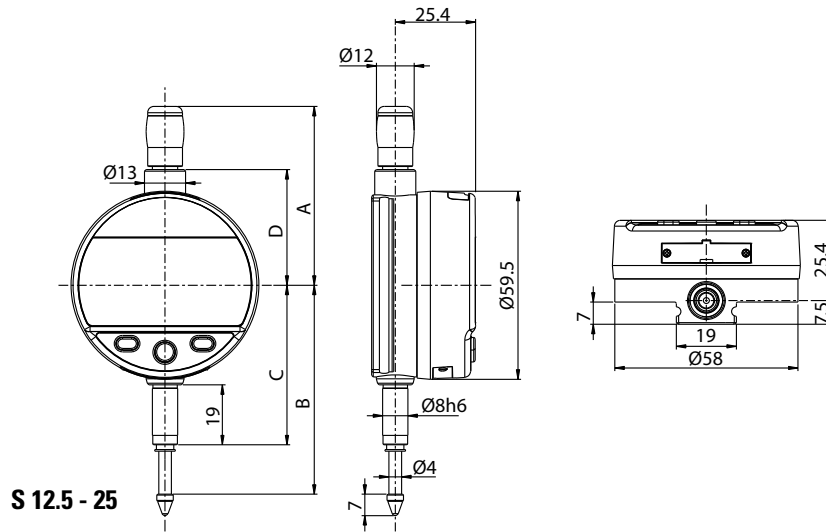

**S 12.5 - 25**

## TECHNICAL SPECIFICATIONS

		805-5306	805-5506	805-6306	805-6506
Measuring range	mm	12.5	25	12.5	25
Resolution	mm	0.0001	0.0001	0.0001	0.0001
Max. Error fe	µm	<b>1.2</b>	<b>1.6</b>	<b>1.2</b>	<b>1.6</b>
Repeatability	µm	0.3			
IP rating		IP54			
A	mm	56.7	69.4	56.7	69.4
B	mm	66.1	78.5	66.1	78.5
C	mm	50.5	50.5	50.5	50.5
D	mm	36.6	49.4	36.6	49.4
Output data		USB / RS232		USB / RS232 / Bluetooth® wireless technology*	
Programmable by PC		●			
Standard functions (customized by PC)		mm/inch, ref I/II, preset (max 999.999) min/max/delta, tolerances, resolution, direction of measurement, multiplication factor, automatic or manual switch off, key lock			

**\* Up to 8 instruments connected per dongle #981-7100**

## STANDARD DELIVERY

## MEASURING FORCE

- Instrument according to technical specifications
- Lithium battery CR2032 included
- Instruction manual
- Calibration certificate

		S 12.5	S 25
Standard	N	0.65 - 0.90	0.65 - 1.15
Low <sup>2)</sup>	N	0.4 - 0.55	0.45 - 0.9
High <sup>2)</sup>	N	1.0 - 1.6	0.9 - 1.8

Tolerance ± 20%, spindle in outgoing measurement position.  
<sup>2)</sup> on request



# Digital indicators


# S\_Dial WORK

## DESCRIPTION

## ANALOG NANO SMART

- Robust digital comparator with  $\varnothing$  59.5 mm housing rotatable by 270°.
- Integrated Bluetooth® system on Smart model
- Large display resolution 0.0001 mm (0.1  $\mu$ m) with tolerance status indication by colour LEDs
- High accuracy and repeatability
- Five buttons, including the central button with selectable favourite function
- Wide range of functions, including MIN/MAX/DELTA
- Proximity» and «Power» data outputs allowing the instrument to be used without batteries when connected by this cable.
- Measuring range selectable: 12.5 and 25 mm
- Special low or high pressure versions available on request
- Protection class IP54

B

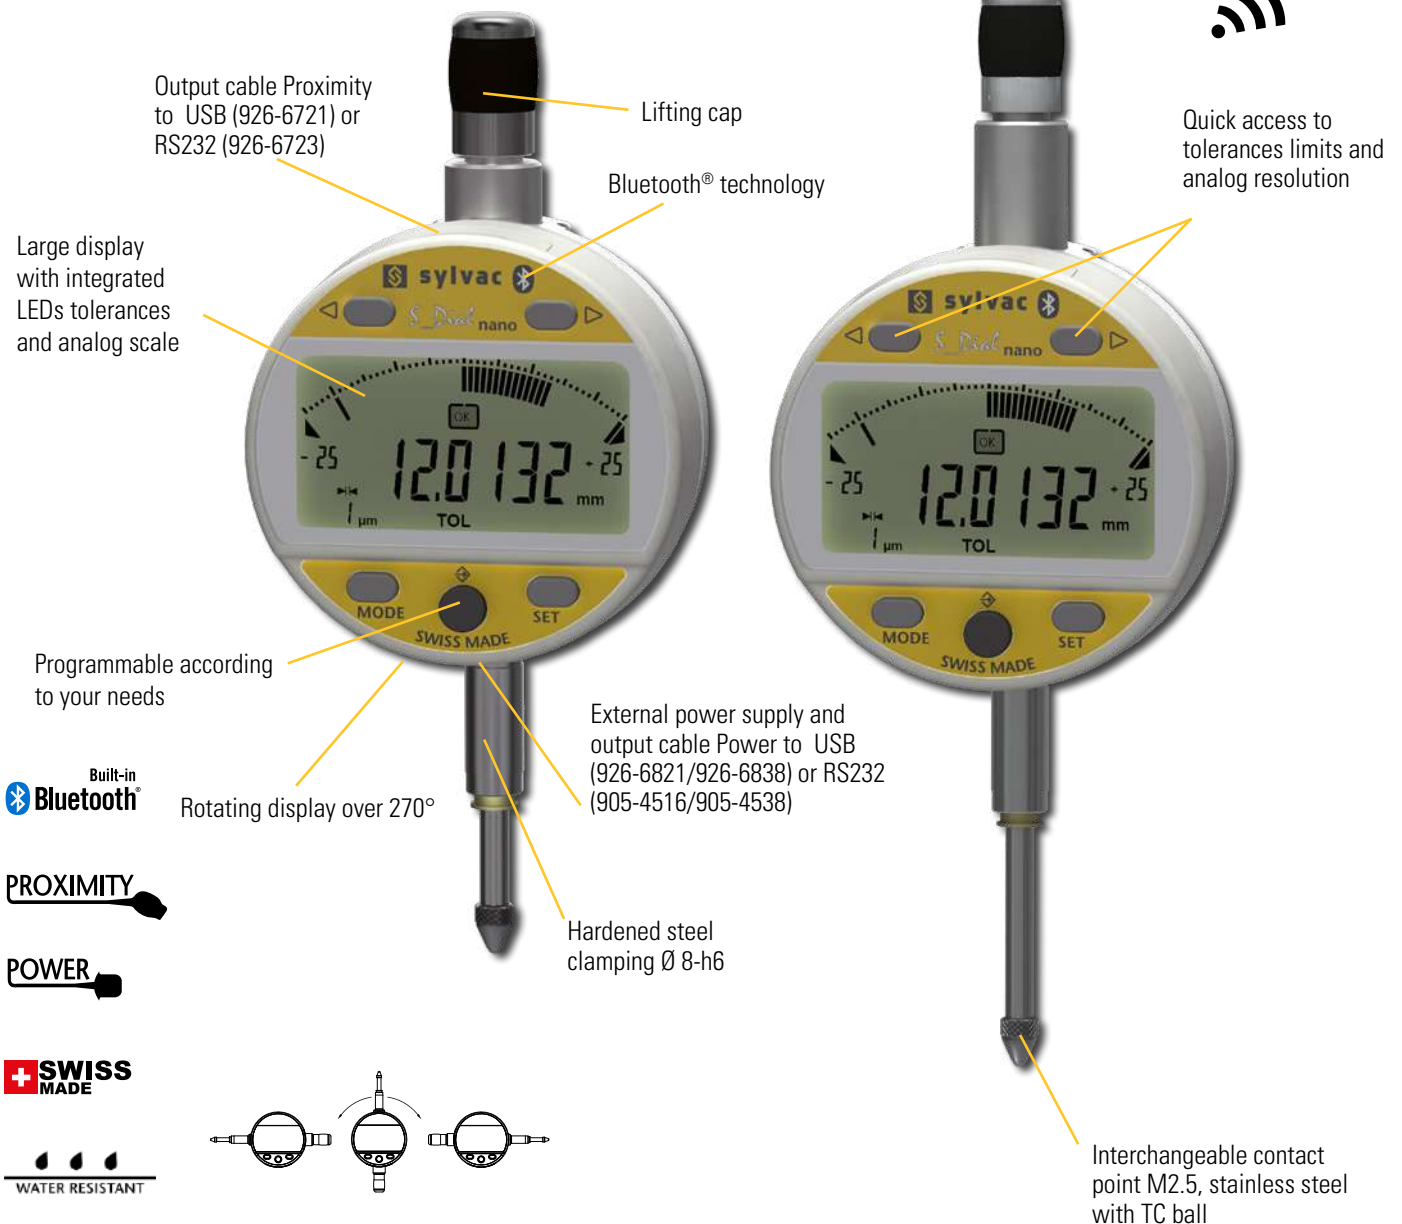

\* SIS description on page 5




# Digital indicators

# S\_Dial WORK

## DIMENSIONAL DRAWINGS

## ANALOG NANO SMART

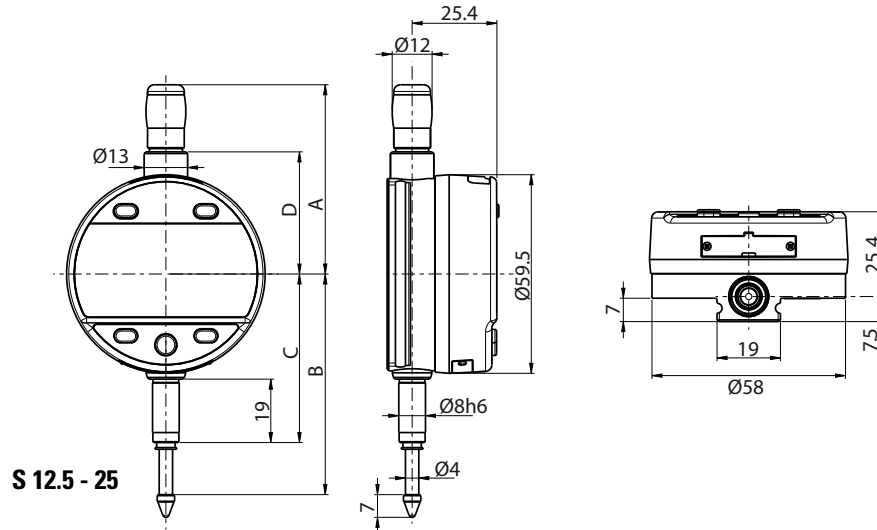

**S 12.5 - 25**



## TECHNICAL SPECIFICATIONS

		805-6307	805-6507
Measuring range	mm	12.5	25
Resolution	mm	0.0001	
Max. Error fe	µm	<b>1.2</b>	<b>1.6</b>
Repeatability	µm	0.3	
IP rating		IP54	
A	mm	56.7	69.4
B	mm	66.1	78.5
C	mm	50.5	50.5
D	mm	36.6	49.4
Output data	USB / RS232 / Bluetooth® wireless technology*		
Programmable by PC	●		
Standard functions (customized by PC)	mm/inch, preset (max 99.9999 or 999.999) min/max/delta, tolerances, resolution, direction of measurement, multiplication factor, automatic or manual switch off, key lock		

**\* Up to 8 instruments connected per dongle #981-7100**

## STANDARD DELIVERY

## MEASURING FORCE

- Instrument according to technical specifications
- Lithium battery CR2032 included
- Instruction manual
- Calibration certificate

		S 12.5	S 25
Standard	N	0.65 - 0.90	0.65 - 1.15
Low <sup>2)</sup>	N	0.4 - 0.55	0.45 - 0.9
High <sup>2)</sup>	N	1.0 - 1.6	0.9 - 1.8

Tolerance ± 20%, spindle in outgoing measurement position.  
<sup>2)</sup> on request

# Digital indicators


# S\_Dial WORK

## DESCRIPTION

PLC

B

- Robust digital comparator with Ø 59.5 mm housing rotatable by 270°.
- Instrument for automation and robotics
- Large display resolution 0.01 mm or 0.001 mm with tolerance status indication by colour LEDs
- Three buttons, including the central button with selectable favourite function
- Wide range of functions, including MIN/MAX/DELTA
- Data outputs «Open connector» for using the instrument without batteries (powered by the device) and «Proximity».
- Selection of the communication protocol to be chosen between ASCII, MODBUS and ORBIT
- Measuring range selectable: 12.5 and 25 mm
- Special low or high pressure versions available on request
- Protection IP54 for the 0.01 mm resolution version and IP67 for the 0.001 mm resolution version

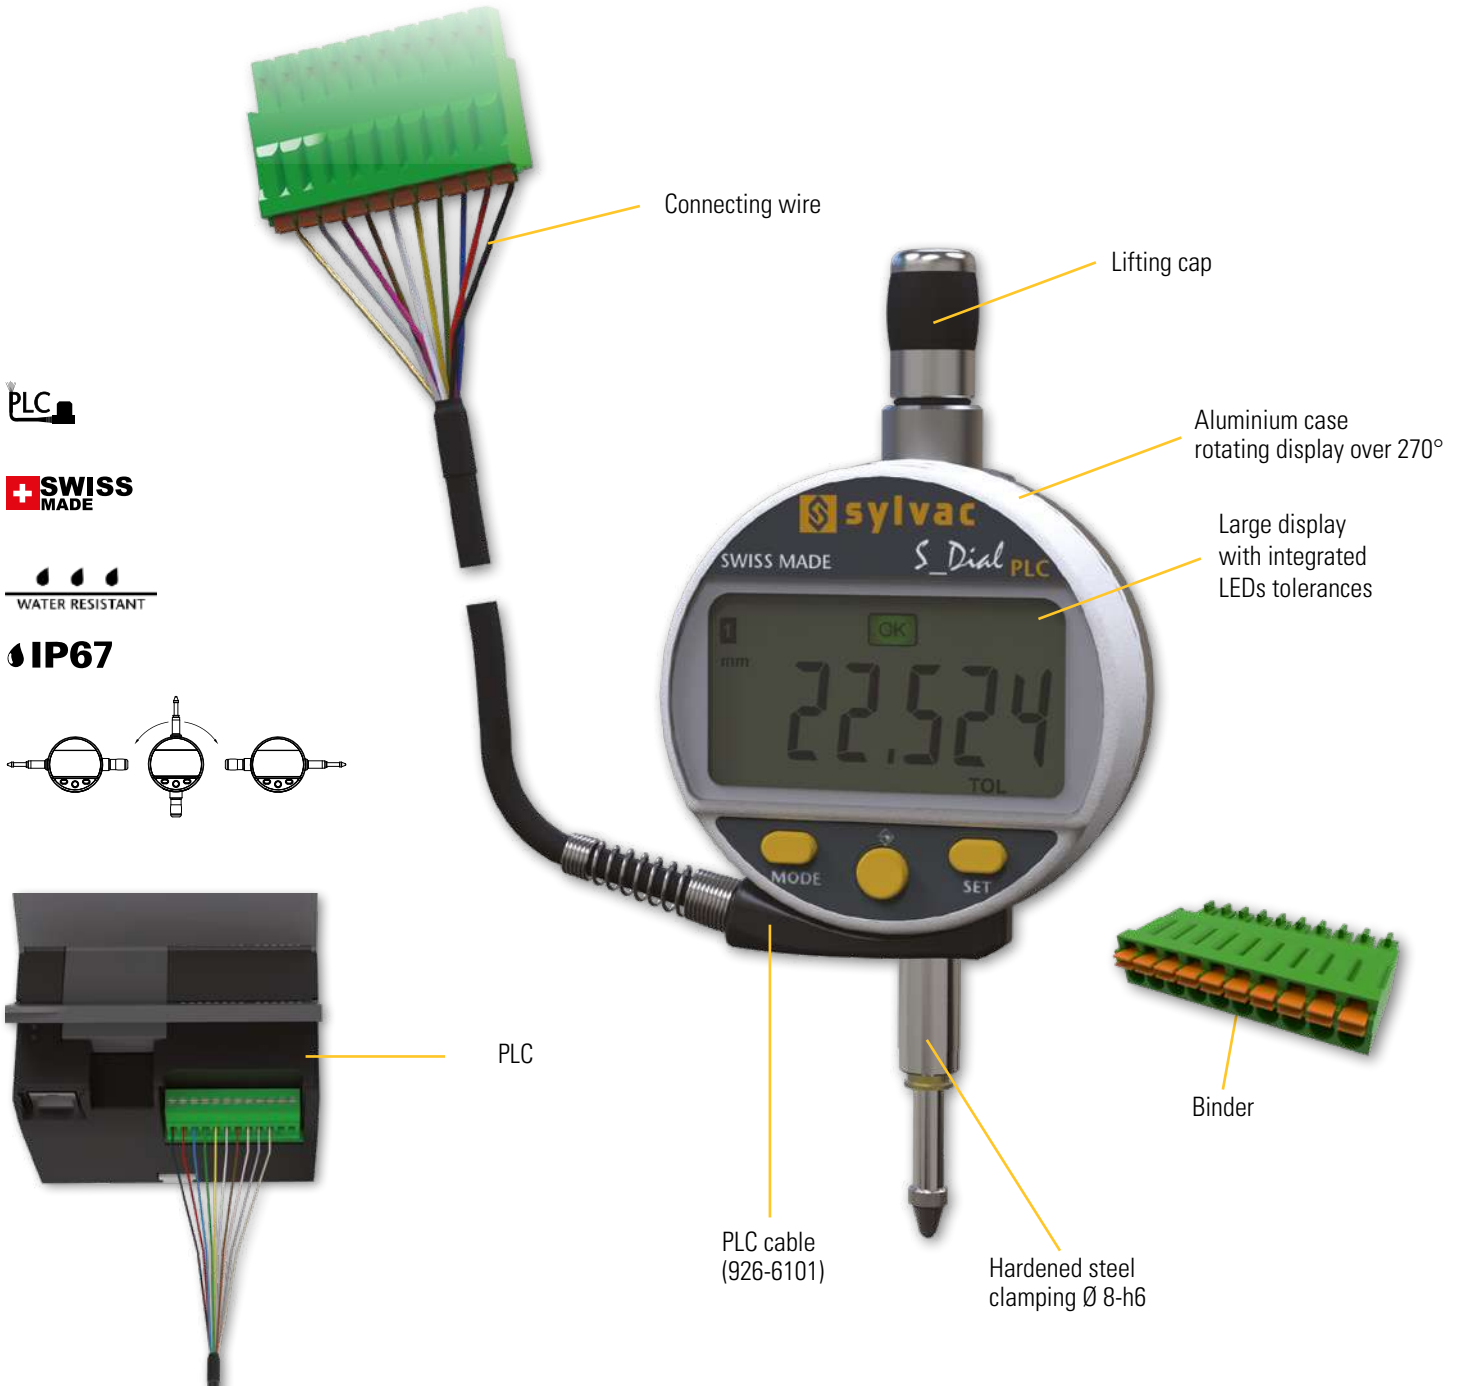




# Digital indicators

# S\_Dial WORK

## DIMENSIONAL DRAWINGS

PLC

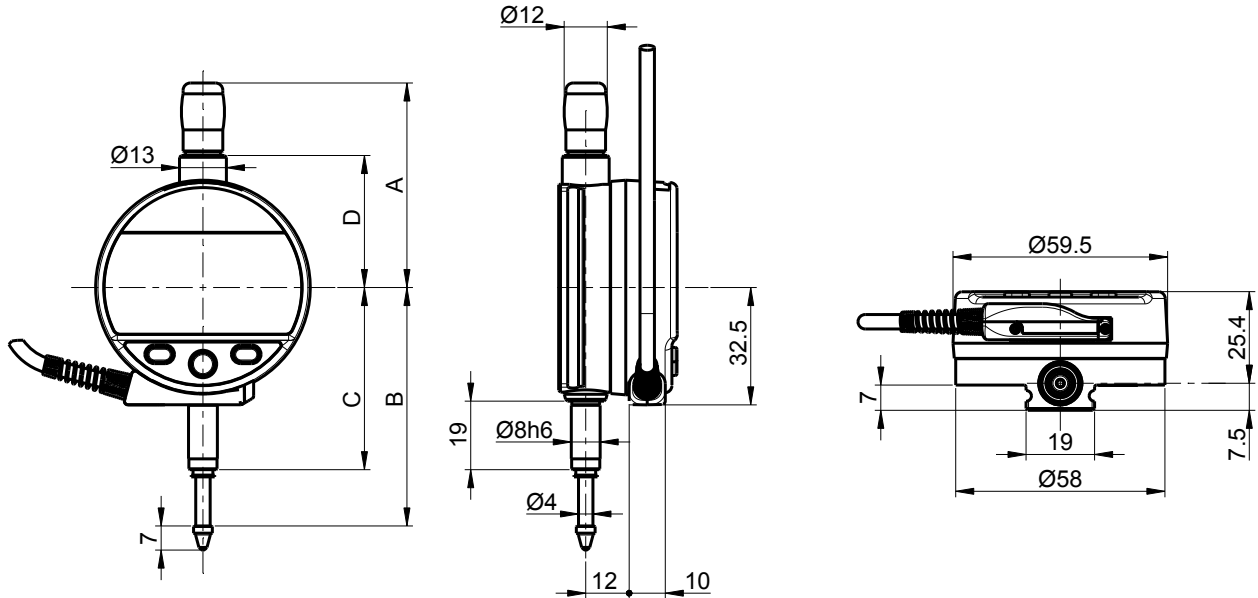

B

## TECHNICALS SPECIFICATIONS

		805-7301	805-7201	805-7501	805-7401
Measuring range	mm	12.5	12.5	25	25
A	mm	56.7		69.4	
B	mm	66.1		78.5	
C	mm	50.5		50.5	
D	mm	36.6		49.4	
Resolution	mm	0.001	0.01	0.001	0.01
Max. Error fe	µm	4	10	5	10
Repeatability	µm	2			
Output data		PLC cable / RS232 (Proximity) and RS485 (cable) compatible			
Data bus		RS485 compatible / Charge 1/256 (Protocole MODBUS, ASCII or ORBIT)			
Measuring force	N	0.65 - 0.9		0.65 - 1.15	
IP rating		IP67	IP54	IP67	IP54
Clamping		Ø8h6, interchangeable anvil probe M2.5			
Standard functions (customizable by PC)		mm/inch, ref I/II, preset (max 999.999) min/max/delta, tolerances, resolution, measuring direction, multiplier, keylock			

## INSTRUMENT DE BASE

- Instrument according to technical specifications
- PLC cable + binder included
- Manual
- Calibration certificate

# Digital indicators

# S\_Dial PRO

## DESCRIPTION

## SMART

B

- Robust digital comparator with  $\varnothing$  59.5 mm housing rotatable by 270°.
- Large display resolution 0.0001 mm (0.1  $\mu$ m) with tolerance status indication by colour LEDs
- High accuracy over the entire measuring range thanks to an electronically corrected scale system with reference marks
- Measuring error less than 1.2  $\mu$ m over 50 mm
- Three buttons, including the central button with selectable favourite function
- Wide range of functions, including MIN/MAX/DELTA
- Bluetooth®, Proximity» and «Power» data outputs allowing the instrument to be used without batteries when connected by this cable.
- Available with a fixing diameter of 8 mm and 25 mm for some models
- Measuring range of your choice: 25, 50 and 100 mm
- Available in standard pressure or low-pressure version without return spring for vertical use.
- Protection class IP51



Large display with integrated LEDs tolerances

Aluminium case rotating display over 270°

Customizable button

Clamping  $\varnothing$ 25 - g7  
Stainless steel chrome

Output cable Proximity to USB (926-6721) or RS232 (926-6723)

50 mm

External power supply and output cable Power to USB (926-6821/926-6838) or RS232 (905-4516/905-4538)

Aluminium tube

Clamping  $\varnothing$ 8 - h6  
Stainless hardened steel

Lifter



100 mm

25 mm




# Digital indicators

# S\_Dial PRO

## DIMENSIONAL DRAWINGS

## SMART

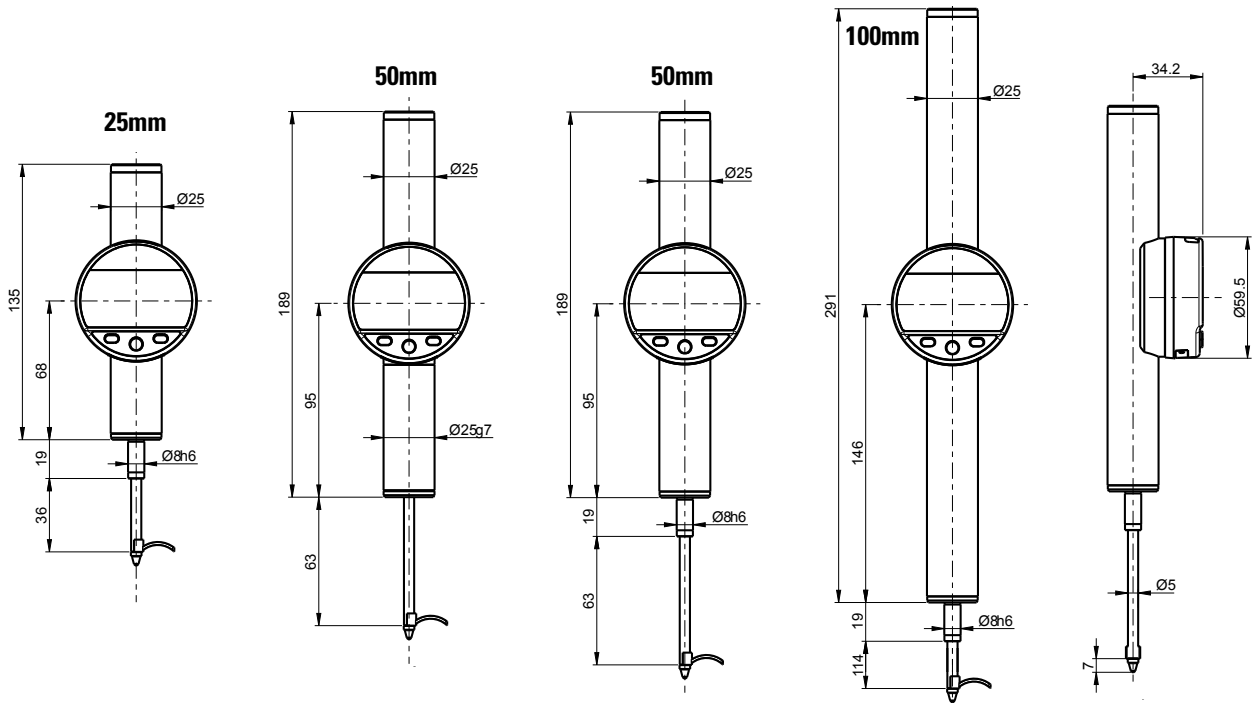

## TECHNICALS SPECIFICATIONS

		805-8501	805-8502	805-8601	805-8701	805-8602	805-8702	805-8661
Measuring range	mm	25		50			100	
Resolution	mm	0.0001						
Max. Error fe	µm	<b>1.0</b>		<b>1.2</b>			<b>1.8</b>	
Repeatability	µm	0.2						
Output data		USB / RS232 / Bluetooth® wireless technology*						
Programmable by PC		●						
Clamping		ø8 h6			ø25 g7		ø8 h6	
Spring		●	1)	●	1)	●	1)	●
Measuring force	N	0.75 - 1.00 <sup>2)</sup>	0.30 <sup>2)</sup>	0.85 - 1.2 <sup>2)</sup>	0.40 <sup>2)</sup>	0.85 - 1.2 <sup>2)</sup>	0.40 <sup>2)</sup>	0.90 - 1.30 <sup>2)</sup>
IP rating		IP51						
Standard functions (customizable by PC)		mm/inch, ref I/II, preset (max 99.9999) min/max/delta, tolerances, resolution, measuring direction, multiplier, automatic extinction/manual, keylock						

<sup>1)</sup> Model without spring : Constant measuring force, use only in a vertical position

<sup>2)</sup> The values agree within ± 20% (vertical down, measuring rod outgoing)

**\* Up to 8 instruments connected per dongle #981-7100**

## INSTRUMENT DE BASE

- Instrument according to technical specifications
- Lithium battery CR2032 included
- Lifter included
- Manual
- Calibration certificate



# Digital indicators

# S\_Dial

## APPLICATIONS

B



Measurement of a span with S\_Dial WORK equipped with measuring ball probe 905-2207



S\_Dial WORK CBG measuring with bore gauge system



S\_Dial WORK mounted on a Sylvac PS15 bench




S\_Dial WORK Smart working in duplex mode and connected to D300S to measure concentricity, roundness, etc.



S\_Dial WORK PLC connected to a PLC



S\_Dial WORK Analog used on bore gauge system

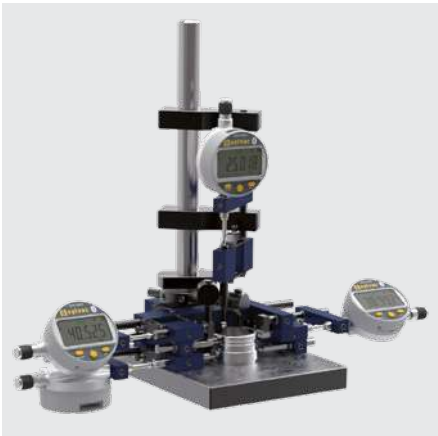

Indicators with Bluetooth® Wireless technology on a 4 points jig



Indicators with Bluetooth® Wireless technology on an iPad through the Sylvac BT Smart App



S\_Dial PRO on ceramic stand





# Digital indicators

# S\_Dial

## LIFTING DEVICES



Lower lifting lever, type 905-4214



Lifting device on S\_Dial PRO Basic



Upper lifting device type 905-4215

B



Pneumatic lifting device type 905-2218



Vacuum lifting device type 905-2220



Lifting device with photo-cable type 905-2216



Lifting device type 905-2214



Lifting device on S\_Dial WORK Smart



Upper lifting lever type, 905-2215






# Digital indicators

# S\_Dial

## ACCESSORIES

Contact points M2.5

B



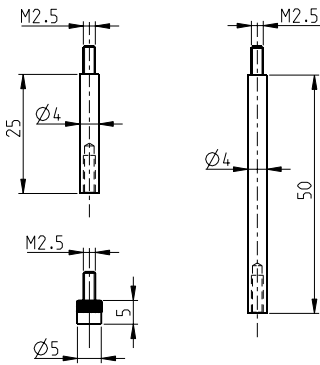


**905-2201 (carbide)**

**905-2202**

**905-2203**

S\_Dial Mini  
 S\_Dial TEST (805-4321)  
 S\_Dial TEST (805-4322)  
 S\_Dial TEST (805-4323)  
 S\_Dial WORK  
 12,5 - 25 mm  
 S\_Dial WORK  
 50 - 150 mm  
 S\_Dial PRO




**905-2206**

**905-2204**


**905-2205**

**905-2207**




**905-2240**

Short stylus, TC ball




**905-2241**

Short standard stylus, TC ball




**905-2242**

Short stylus, TC ball




**905-2243**

Long stylus, TC ball



**905-2244**

Long standard stylus, TC ball



**905-2245**

Long stylus, TC ball




# Digital indicators

# S\_Dial

## ACCESSORIES


S\_Dial Mini  
S\_Dial TEST  
S\_Dial WORK  
12,5 - 25 mm  
S\_Dial WORK  
50 - 150 mm

B



**905-2246** Clamping stem

• •




**905-2247** Clamping stem

• •



**905-2248** Spanner for probe

•




**805-0214** Lifting device, range 12.5mm

• <sup>1)</sup>



**805-0215** Lifting device, range 25mm

• <sup>1)</sup>



**805-0213** Lug back  
(delivered with 4 screws M2x4 DIN 963A)

• <sup>1)</sup> • <sup>1)</sup>

**905-2231** Sleeve Ø8 --> 10mm with locking screw

• • • •

**905-4212** Screwdriver for S\_Dial MINI & TEST

• •




<sup>1)</sup> Except S\_Dial WORK Basic

# Digital indicators

# S\_Dial

## ACCESSORIES

B

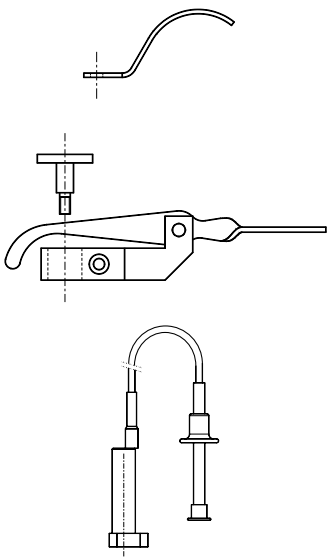







		S_Dial Mini	S_Dial TEST	S_Dial WORK 12,5 - 25 mm	S_Dial WORK 50 - 150 mm	S_Dial PRO
905-2214	Lifting device	•		•	•	•
905-2215	Upper lifting device			•		
905-2216	Lifting device with photo-cable			•		
905-2218	Pneumatic lifting device with foot pedal			•		
905-2217	Lifter only for 905-2218			•		
905-2219	Pneumatic foot pedal for 905-2218	•		•		
905-2220	Vacuum lifting device with foot pedal				•	
905-2227	Pressure controller				•	
905-2228	Vacuum foot pedal for 905-2220				•	



# Digital indicators

# S\_Dial

## ACCESSORIES

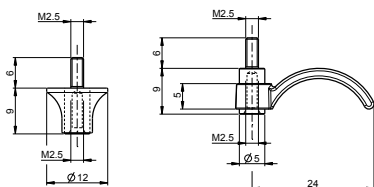

		S_Dial Mini	S_Dial TEST	S_Dial WORK 12,5 - 25 mm	S_Dial WORK 50 - 150 mm	S_Dial PRO
<b>905-2221</b>	Dust protection for indicator, range 12.5 mm			•		
<b>905-2222</b>	Dust protection for indicator, range 25 mm			•		
<b>905-2223</b>	Depth measuring base			•	•	
<b>905-2261</b>	Snap connector for pneumatic lifter x2	•		•	•	
<b>905-2262</b>	Snap connector for pneumatic lifter x4	•		•	•	
<b>905-4211</b>	Center lug back	•	•			
<b>905-2224</b>	Plastic lifting lever (bottom)	•		•	•	•
<b>905-2225</b>	Plastic lifting ring (bottom)	•		•	•	•




# Digital indicators

# S\_Dial

## ACCESSORIES

B



**905-4214**

Lower lifting device, range 12.5 mm

S\_Dial Mini

S\_Dial TEST

S\_Dial WORK  
12,5 - 25 mm

S\_Dial WORK  
50 - 150 mm

S\_Dial WORK  
PLC




1)

1)


1)

1)

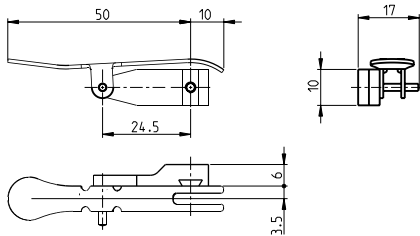


**905-4215**

Upper lifting device for S (Standard) execution

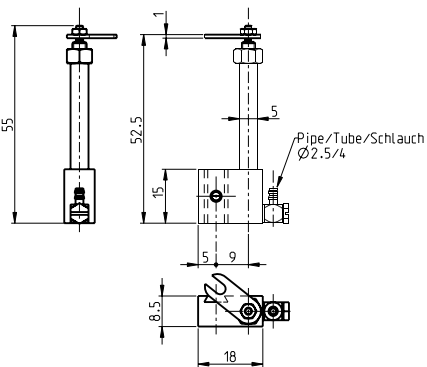

**905-4217**

Pneumatic lifting device for standard type



**926-6101**

Replacement cable for digital indicator PLC



<sup>1)</sup> used on range 20 mm max




# Digital indicator testing stand M3

## DESCRIPTION

- Set for the periodic calibration of analogue and digital comparators up to 50 mm stroke as well as for lever indicators
- Set consisting of the M3 bench that can be used vertically or horizontally, the reference instrument and the Sycopro II software integrating several international standards.
- Bench with rapid manual movement and fine final approach
- Available in 2 versions, with different reference instruments and different measuring ranges :
  - Set with capacitive touch probe paired with display unit, 10 and 25 mm (max. error 0.8 µm)
  - Set with precision dial gauge with integrated display, 25 and 50 mm (max. error 1.2 µm)
- Calibration according to the ABBE principle
- Real-time display of instrument status
- Creation of customised test certificates

B

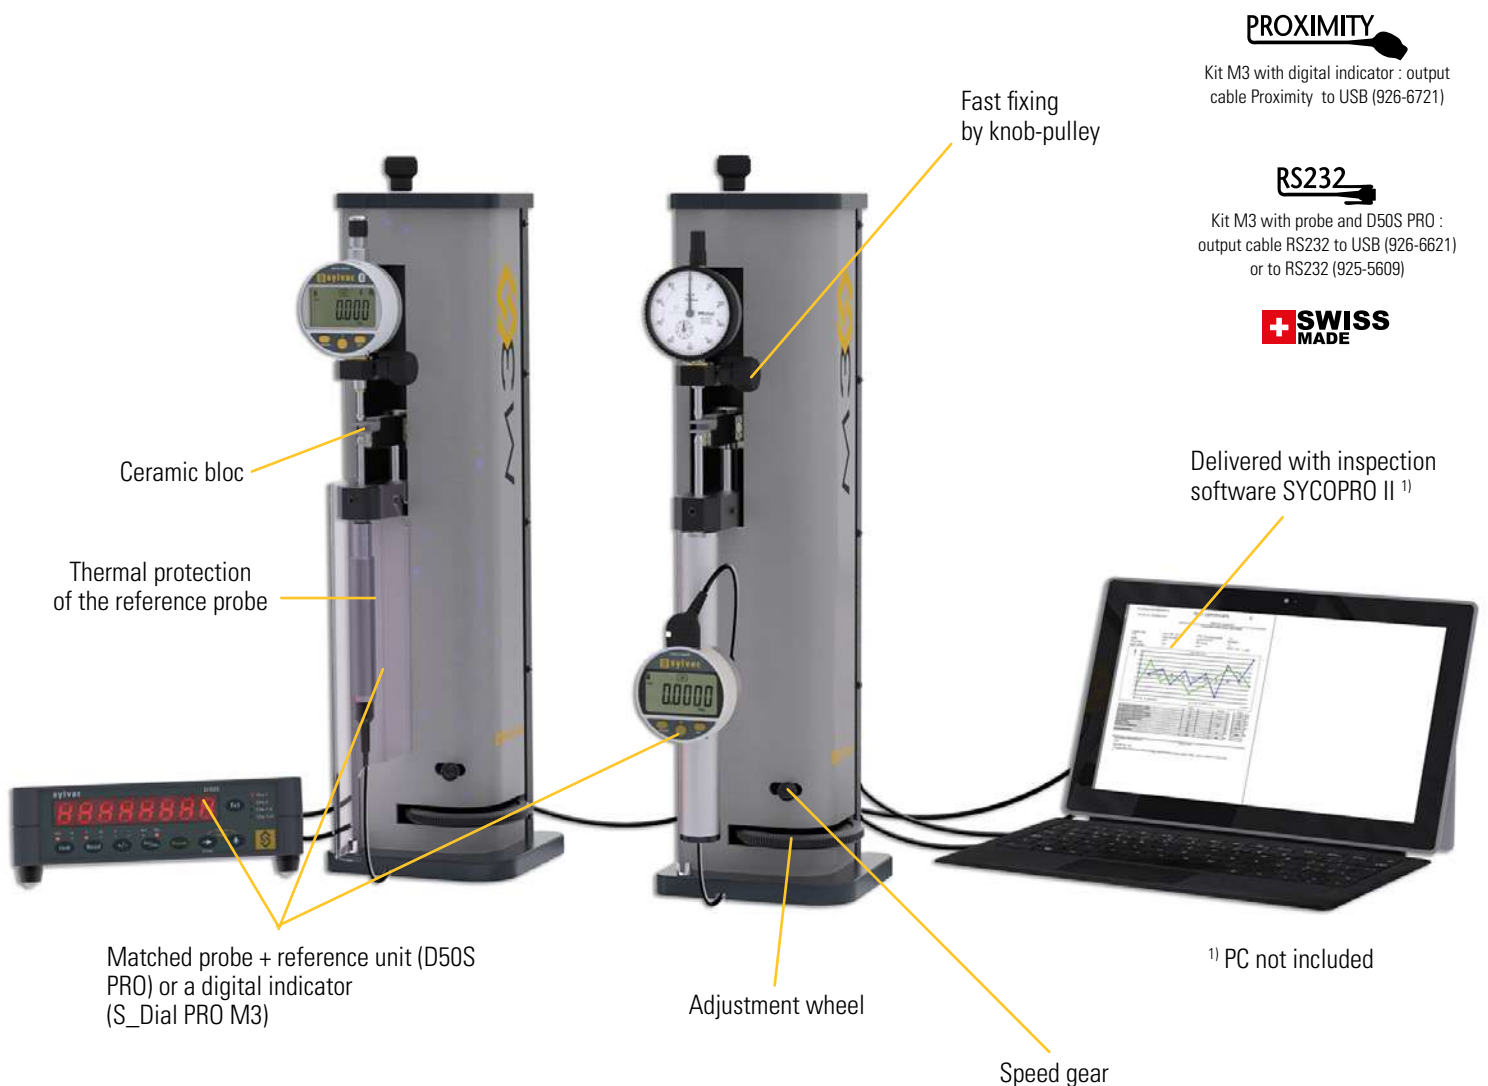

**PROXIMITY**

Kit M3 with digital indicator : output cable Proximity to USB (926-6721)

**RS232**

Kit M3 with probe and D50S PRO : output cable RS232 to USB (926-6621) or to RS232 (925-5609)

**SWISS MADE**



Delivered with inspection software SYCOPRO II <sup>1)</sup>

<sup>1)</sup> PC not included

# Digital indicator testing stand M3

## DISPLAY/SOFTWARE

- 1 Display the curves of measurement
- 2 Check the error and repeatability
- 3 Creation and management of instrument groups
- 4 Fast access to all of stored instruments
- 5 Integrated standards
- 6 Personalisation of the standards
- 7 Display the measured values
- 8 Possibility to customize the certificate

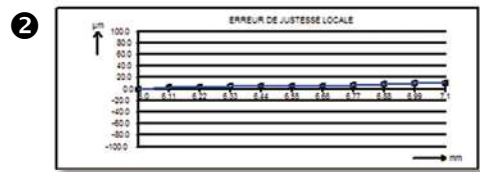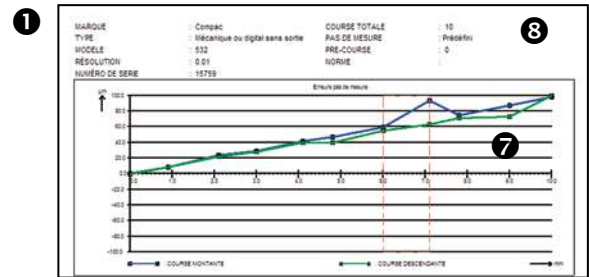

## TECHNICAL SPECIFICATIONS

		Kit with probe and D50S PRO		Kit with digital indicator	
		809-1303	809-1301	809-1305	809-1304
Measuring range	mm	M3 Kit probe 10 mm	M3 Kit probe 25 mm	M3 Kit S_Dial PRO M3 25 mm	M3 Kit S_Dial PRO M3 50 mm
Max. Error	µm	0.6	0.8	1.0	1.2





# Digital indicator testing stand M3

## STANDARD DELIVERY

- M3 support
- 3 ceramic shims precision DIN861 Grade 1: 2 x 1.5 mm and 1 x 4 mm
- CD with Sycopro II software and its activation licence
- Accessory 909-2010 for the control of lever indicators
- Calibration certificate

B



### Set with probe and units

- Pair measuring probe with unit D50S Pro
- Charging unit according to country
- External contact (pedal) 904-4101
- RS232 connection cable 925-5609

### Set with precision digital indicator

- S\_Dial Pro M3 dial gauge with special measuring force
- Proximity-USB connection cable 926-6721
- External USB contact (footswitch) 926-7020

## ACCESSORIES



<b>909-2010</b>	Clamping device for test indicator
<b>909-2011</b>	Clamping device for dial gauges Ø 16 / 28 / 30 mm

# Measuring stands


## DESCRIPTION

### Stands with magnetic base for lever indicators

- Imported article
- Vertical rod Ø 16 mm and hinged horizontal rod Ø 12 mm
- Maximum measuring height 350 mm
- Magnetic base with attraction force 80 kg
- Clamping diameter 8 mm

### Stands for comparators and probes with ceramic table

- Imported article
- Vertical chrome steel column Ø 25 mm
- Clamping diameter 8 mm
- Maximum measuring height 115 mm
- Cast iron base with ceramic table 85 x 85 x 25 mm, grade xx

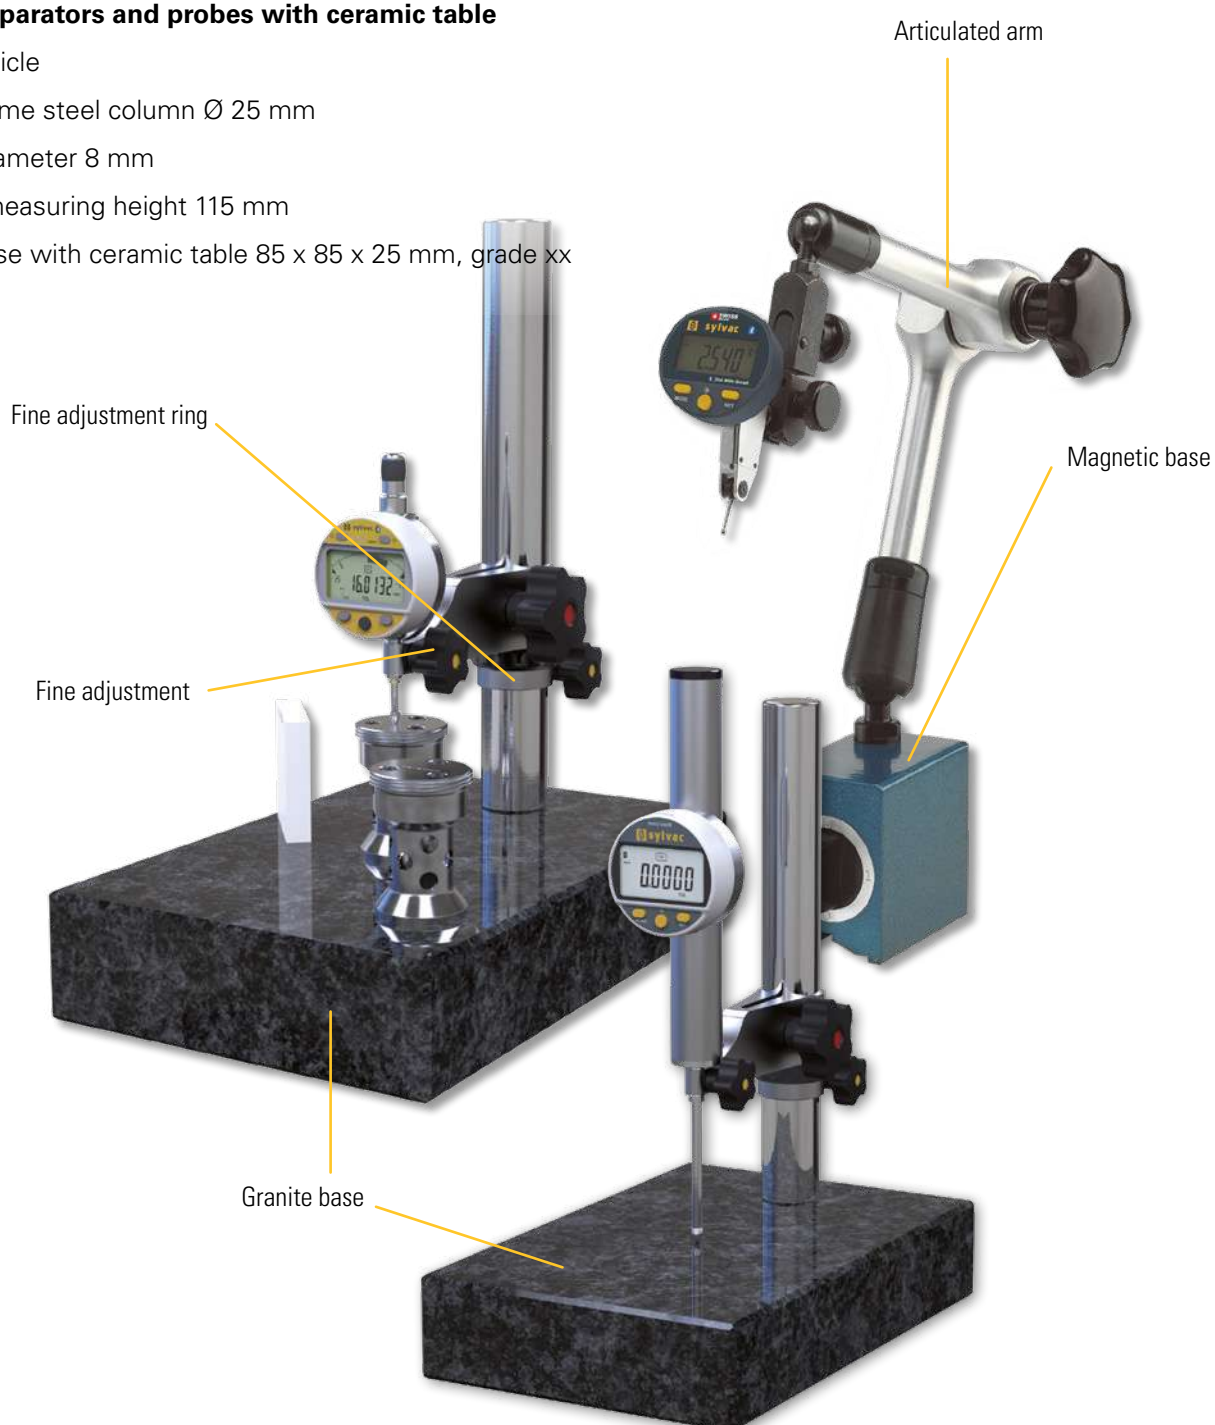




# Measuring stands


## TECHNICAL SPECIFICATIONS



**908-1201**

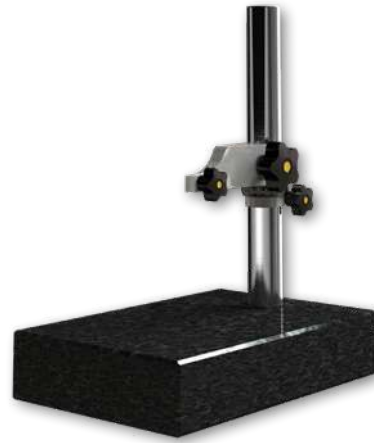

**808-1204**

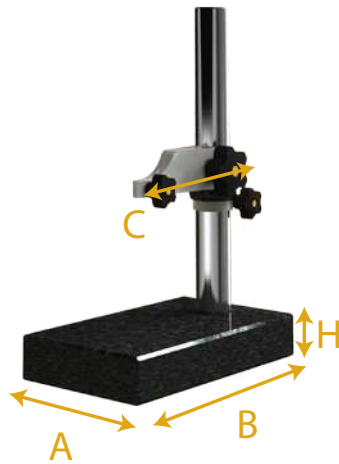

B

		908-1201	808-1204	808-1205
Base		magnetic <sup>1)</sup>	granit grade 00	granit grade 00
Base dimensions AxBxH	mm	70x46x65	300x210x60	300x210x60
Central locking		•	---	---
Column	mm	---	Steel Ø 35	Steel Ø 35
Clamping dimension	mm	Ø 8	Ø 8	Ø 25
Dist. Column.-meas. point. C	mm	---	115	115
Measuring range	mm	---	0 - 260	0 - 260
Total height	mm	430	360	360
Weight	kg	2.2	13.4	13.5
Fine adjustment		---	•	•


<sup>1)</sup> Gripping coefficient : 600N

# Measuring stands

## TECHNICAL SPECIFICATIONS

### Series 808 stands for digital indicators and probes


- Made at Sylvac in Switzerland
- Superior quality compared to the Asian tables generally found on the market
- Reinforced column  $\varnothing$  25 or 35 mm with precision measuring arm for excellent parallelism and high rigidity reducing the measuring error generated by the support.
- Clamping diameter 8 mm and 25 mm (for fixing S\_Dial PRO dial gauges)
- Ring for fine adjustment of the vertical position
- Grade 00 granite base

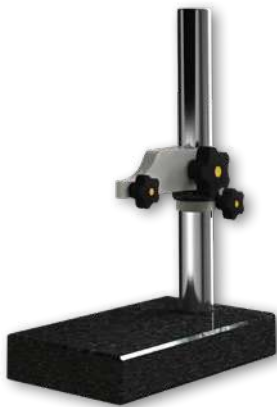


808-1206



808-1203

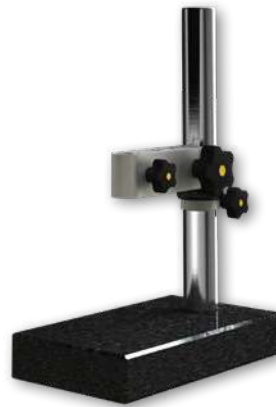

808-1202

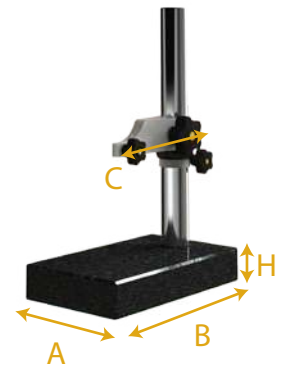

		808-1206	808-1207	808-1202	808-1203	808-1201
Base		granit grade 00	granit grade 00	granit grade 00	granit grade 00	granit grade 00
Base dimensions AxBxH	mm	100X150X40	100X150X40	240x140x50	240x140x50	240x140x50
Central locking		---	---	---	---	---
Column	mm	Steel $\varnothing$ 25	Steel $\varnothing$ 35	Steel $\varnothing$ 35	Steel $\varnothing$ 35	Steel $\varnothing$ 35
Clamping dimension	mm	$\varnothing$ 8	$\varnothing$ 8	$\varnothing$ 25	$\varnothing$ 8	$\varnothing$ 8
Dist. Column.-meas. point. C	mm	70	70	115	70	115
Measuring range	mm	0 - 190	0 - 260	0 - 260	0 - 260	0 - 260
Total height	mm	270	340	340	340	340
Weight	kg	2.9	4.3	6.6	6.5	6.6
Fine adjustment		•	•	•	•	•